




## Description

Low profile (70mm) surface mount fixture with wrap around diffuser.

## Application

general offices, retail, education and commercial.

## Photometric

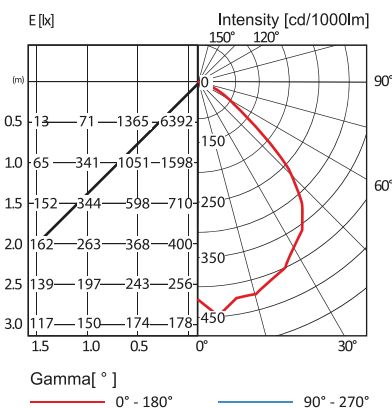

IES file No: SJ4976

## Options

- Dimming
- 3000K/6500K
- Emergency

## Electrical

<b>Control Gear</b>	Philips
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	40W
<b>Lumen Output</b>	>3800lm
<b>CRI</b>	80
<b>LER</b>	95
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

## Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Diffuser</b>	Atlanta Diffuser

## Dimension



## Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PLP A3 (1x2)	618x305x70	Philips	19	>2250	118
PLP B4 (1x2)	618x305x70	Philips	40	>3800	95
PLP C4 (1x2)	618x305x70	Philips	59	>5550	94
PLP B4 (1x4)	1204x305x70	Philips	40	>3800	95
PLP D4 (1x4)	1204x305x70	Philips	80	>7550	94
PLP F4 (1x4)	1204x305x70	Philips	120	>11350	95

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.