




Description

Surface mounted UGR <19 LED troffer.

Application

Offices, education, retail and commercial.

Photometric

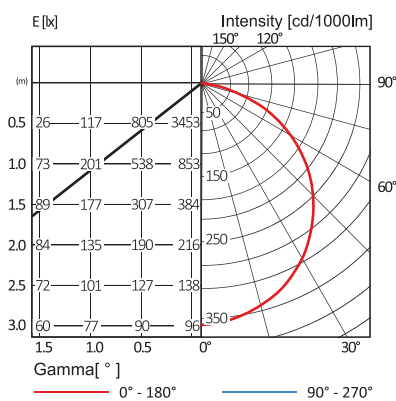

IES file No: SJ4593

Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip (Square)
Wattage	31W
Lumen Output	>2400lm
CRI	80
LER	77
CCT	4000K
SDCM	<3
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	LED Opal

Dimension



Options

- Dimming
- 3000K/5000K/6500K
- Cyanosis
- Emergency

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PSL B5 (2x2)	595x595x90	Tridonic	31	>2400	77
PSL B5 (1x4)	1195x295x90	Tridonic	31	>2400	77

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.