




Description

Surface mount LED troffer complete with prismatic diffuser.

Application

Suitable for office, retail, commercial, education and hospitals.

Photometric

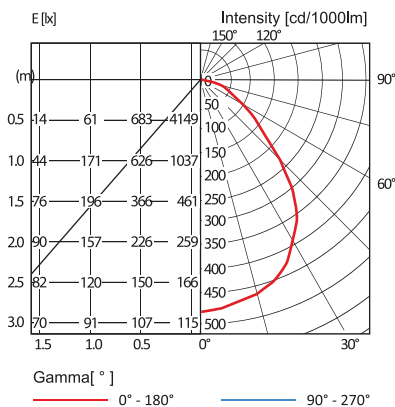

IES file No: SJ5169


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	24W
Lumen Output	>2150lm
CRI	80
LER	90
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	AA12 Acrylic

Dimension



Options

- 3000K / 6500K
- Cyanosis
- Dimming

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PTBT B5/S (2x2)	595x595x70	Tridonic	12	>1150	96
PTBT B5/S (2x2)	595x595x70	Tridonic	20	>2150	108
PTBT B5/S (1x4)	1195x295x70	Tridonic	24	>2150	90
PTBT B5/S (1x4)	1195x295x70	Tridonic	39	>4300	110
PTBT D5/S (1x4)	1195x295x70	Tridonic	48	>4600	96
PTBT D5/S (1x4)	1195x295x70	Tridonic	78	>8650	111

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.