



Your partner in lighting technology



# URANUS LED

## SL 411 Highbay Series

### Features & Benefits

Powerful LED light source with a unique design. Extruded aluminium housing act as heat sink. Precise control of light distribution.

### Application

Ideal for manufacturing plants, sports halls, industrial areas, warehouses & etc.

### Luminaire Product Description

Mounting	Pendant
Housing Material	Extruded Aluminium
Power Supply	220V-240V 50/60Hz
Operating Temperature	-20~+45°C
Power Factor	0.9
Total Harmonic Distortion	≤20%
Ingress Protection	IP65
Insulation Classification	Class I
Life Cycle	50,000hrs


### Optics

Lens Beam	30°x70°
	60°x100°


### Control

*Dimming Option	Fixed Output/1-10V
*Sensor	Motion Sensor

### Photometric

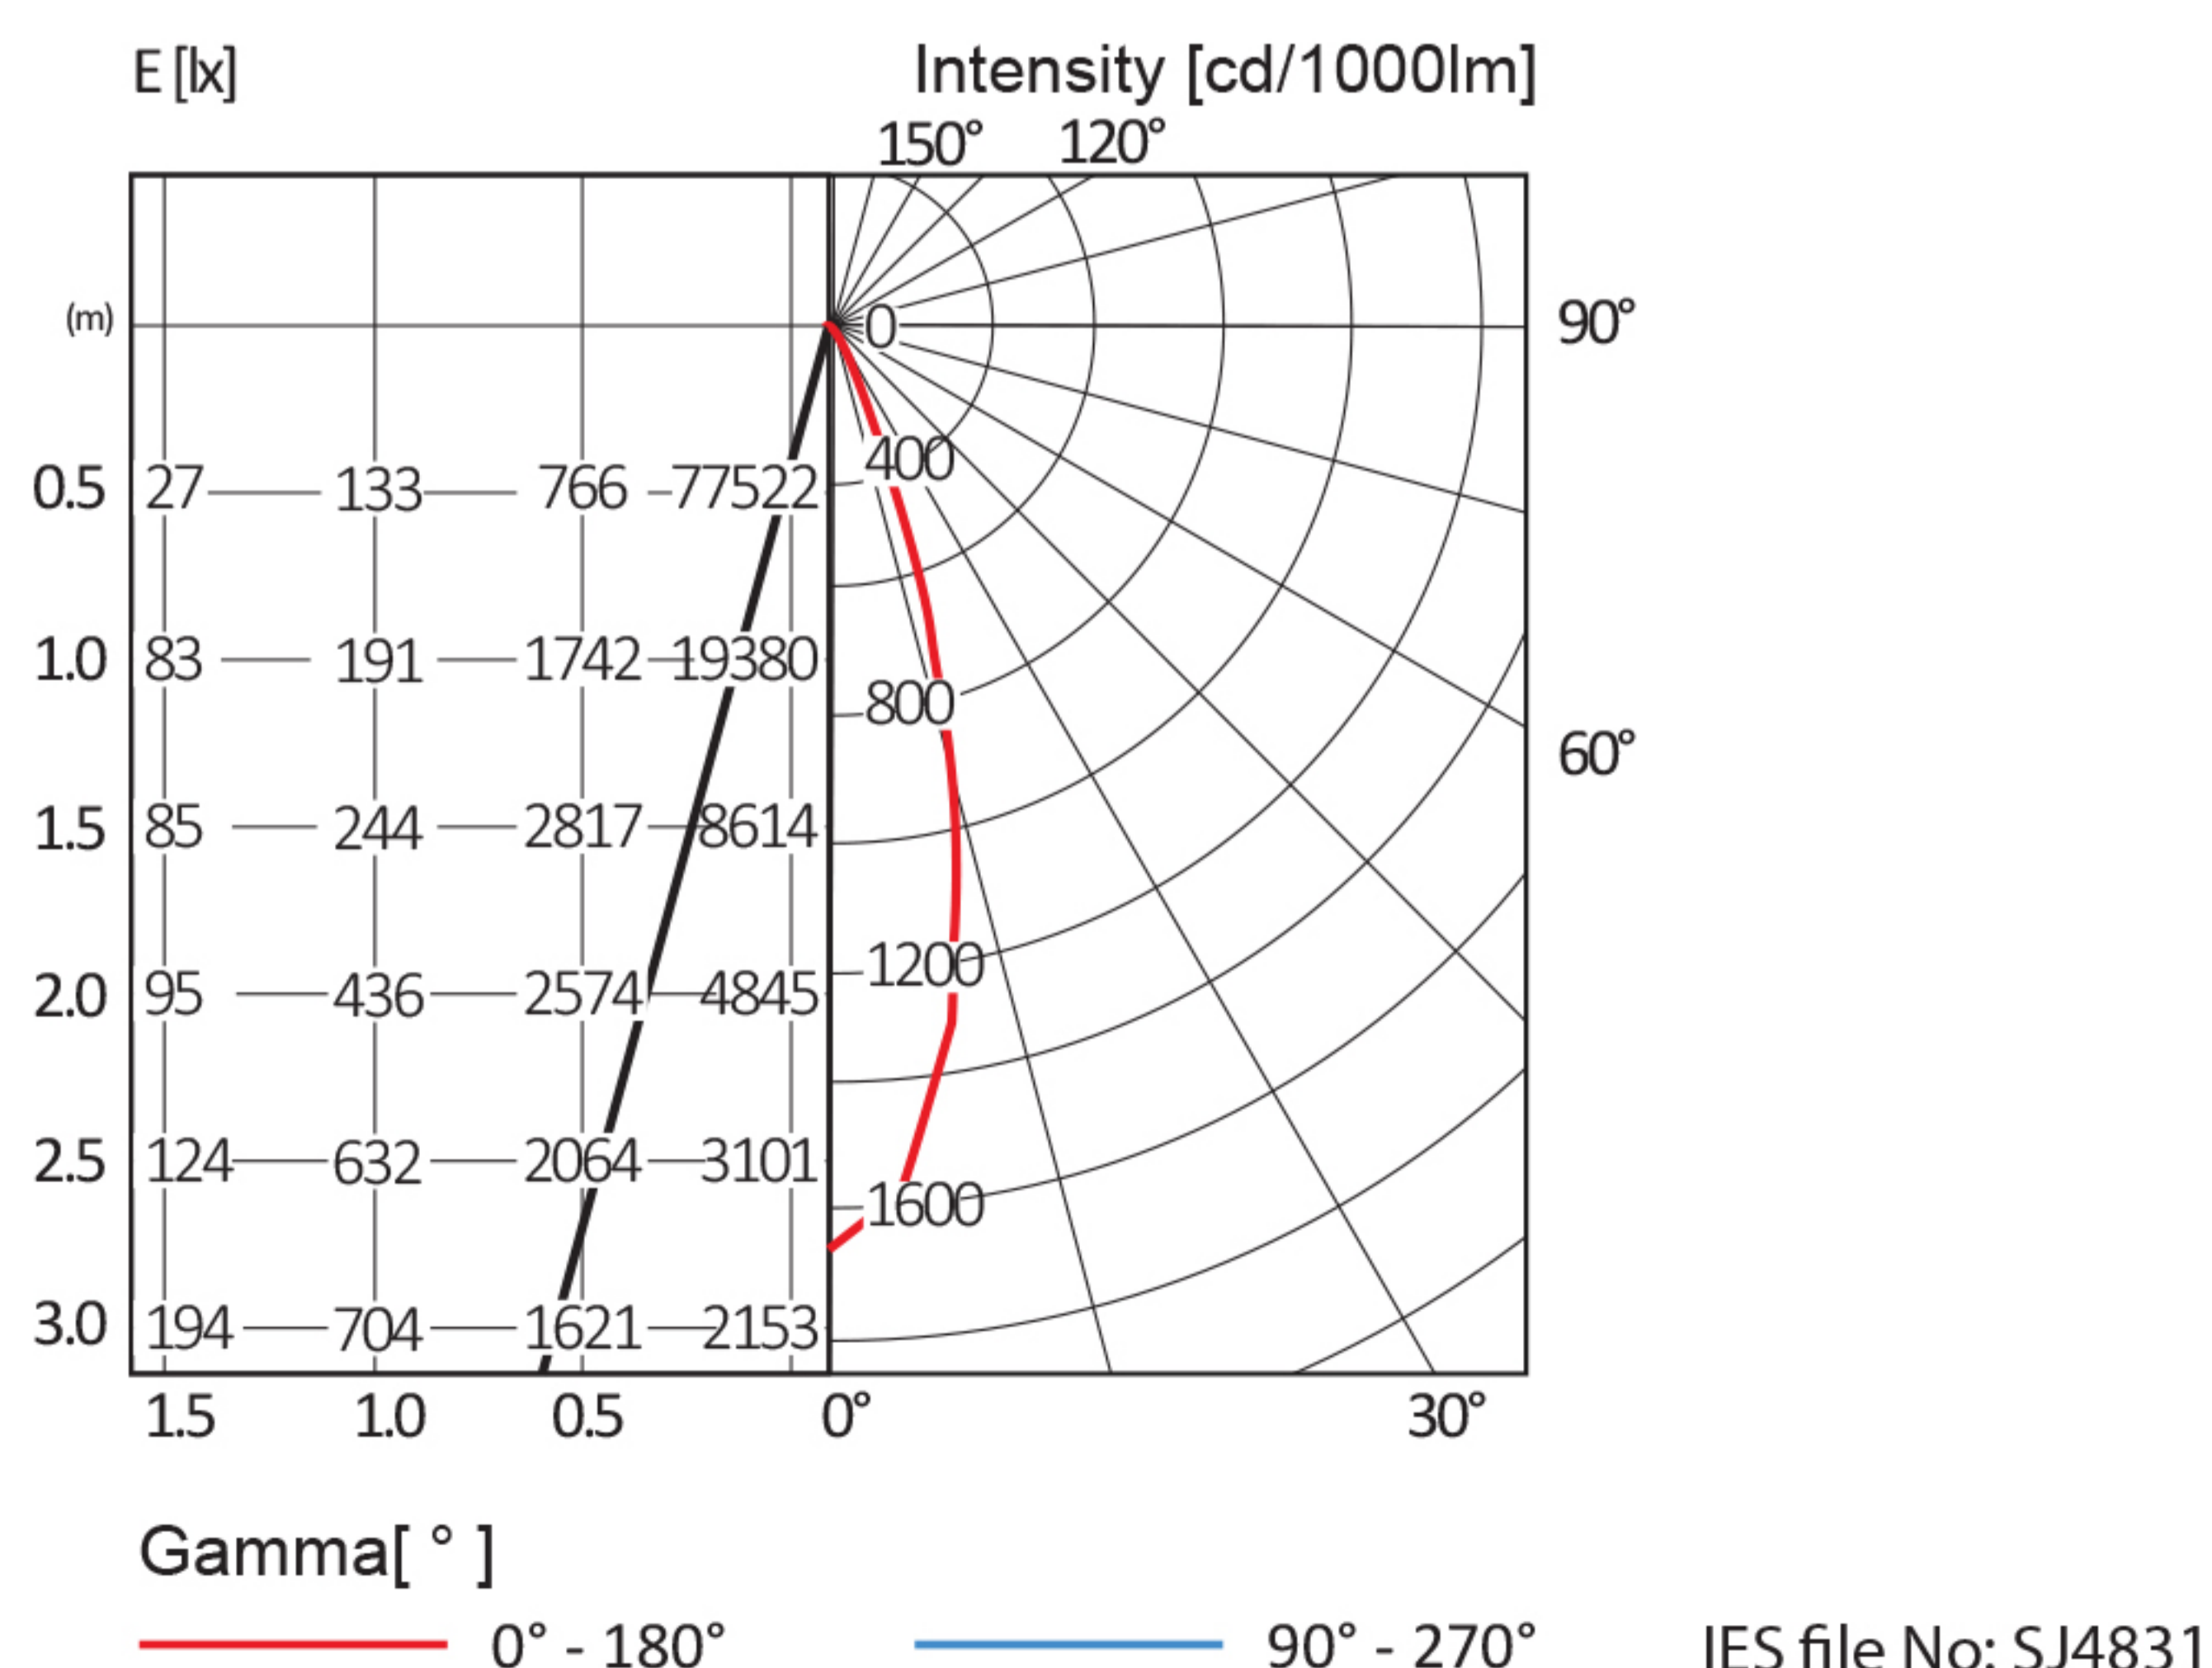

## Dimension

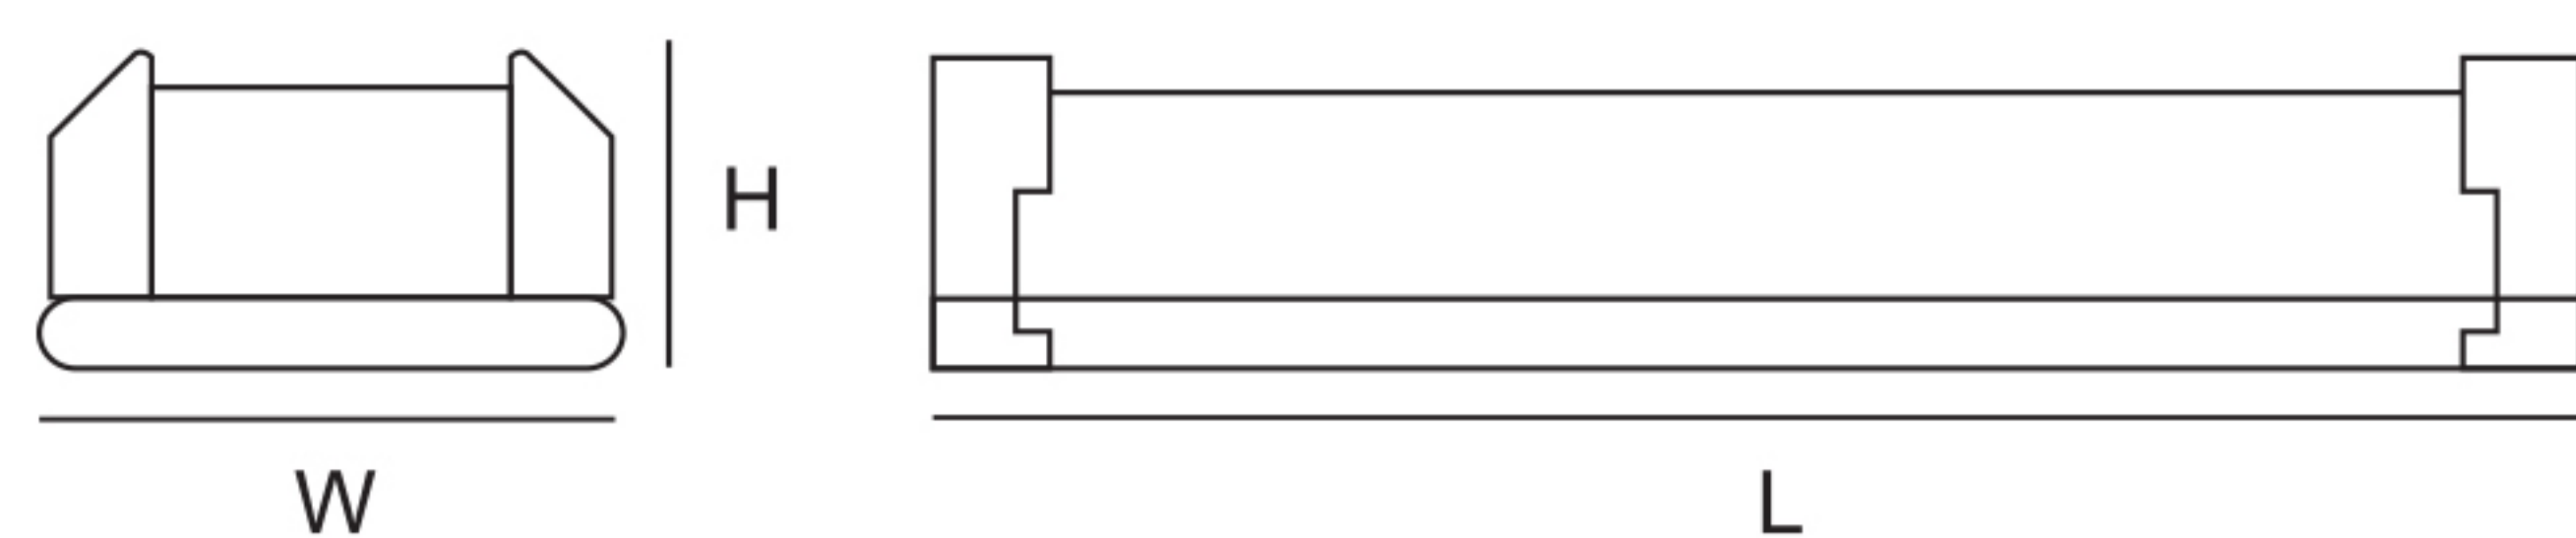

## Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 411.50	342x136x85	MEAN WELL	Lumileds	840/865	50	6000	120
SL 411.100	632x136x85				100	12000	120
SL 411.150	925x136x85				150	18000	120
SL 411.200	1217x136x85				200	24000	120

Note : Subject to +/- 1.5mm

Other various types are available upon request.