



PLUTO LED

CL 104 / CL 105 Panel Light Series



Features & Benefits

Recessed mounted LED Panel light in white finish with anti-glare diffuser and separate energy efficient electronic driver.

Application

Ideal for restaurants, general shops, small offices, reception area & etc.

Luminaire Product Description

Mounting	Recessed
Housing Material	Die Cast Aluminium
Power Supply	220-240V 50/60Hz
Operating Temperature	45°C
Power Factor	0.9
Total Harmonic Distortion	>20%
Ingress Protection	IP20
Insulation Classification	Class II
Life Cycle	25,000hrs


Optics

Diffuser Material	Polystyrene
Diffuser Pattern	Frosted


Control

*Dimming Option	Fixed Output
-----------------	--------------

Photometric

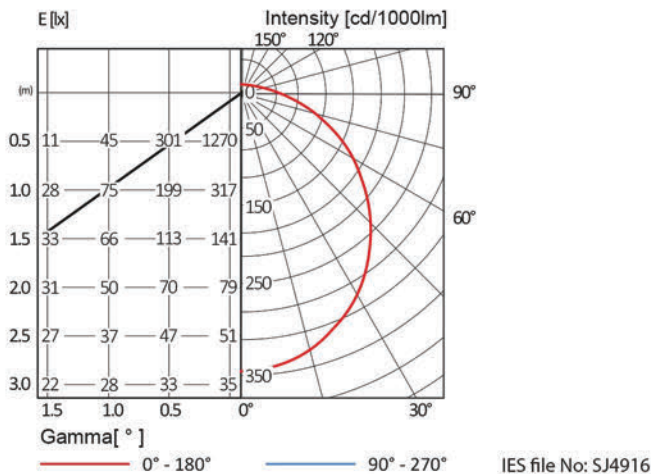

Dimension

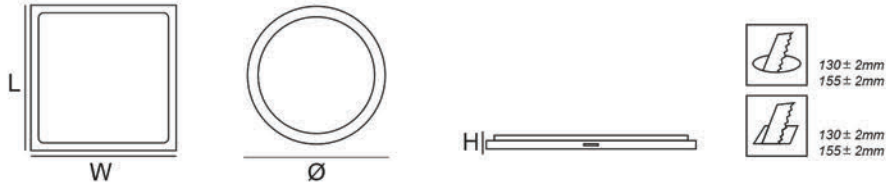

Order Information

Model No.	Dimension (Ø xH) (LxWxH) mm	Driver Model	CRI & CCT	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
CL 104.4 RD	145x20	SJ Lite Eco	830/840/865	9	650	72
CL 104.6 RD	170x20			12	800	67
CL 105.4 SQ	145x145x20			9	600	72
CL 105.6 SQ	170x170x20			12	800	67

Note : Subject to +/- 1.5mm

Other various types are available upon request.