





SAC 240 /W VDU

Woodceiling mounting with parabolic mirror optic louvre. Wide choice of options ensure optimum performance. Ideal for office, schools, libraries, government building, commercial building where VDT Terminal are frequently used.



TM5 Utilization Factors

Utilization factors			LOR =61.2%			DLOR =61.2%			ULOR =0.0%		
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	49	53	56	59	61	63	65	66
	0.3		N.A.	46	50	53	57	59	61	63	65
	0.1		N.A.	43	47	50	54	57	59	62	63
0.5	0.5	0.2	N.A.	48	52	54	58	59	61	63	64
	0.3		N.A.	45	49	52	55	58	59	61	62
	0.1		N.A.	43	47	50	53	56	58	60	61
0.3	0.5	0.2	N.A.	47	50	53	56	58	59	60	61
	0.3		N.A.	45	48	51	54	56	57	59	60
	0.1		N.A.	42	46	49	52	55	56	58	59
0.0	0.0	0.0	N.A.	41	45	47	51	53	54	56	57
			SHR NOM =1.75			SHR MAX =1.99			SHR MAX		
			TR =2.39								

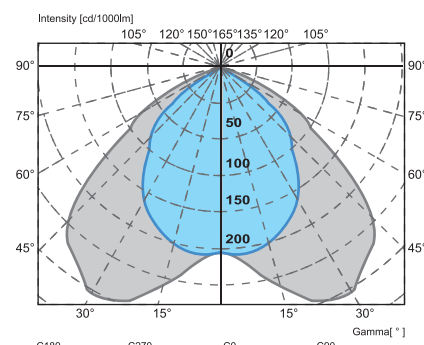

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Louvre	High quality specular anodised aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent TLD lamp of 18W & 36W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional Component	Fused terminal block/High frequency electronic ballast/Emergency pack
	Radio interference suppressors.
Optional Light Source	** SJ Lite LED Tube is compatible and replaceable (Not compatible for ECG/Emergency fitting).

Dimensions

**Request for advise if install other brand of LED tube.

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 220/W VDU	2x18W	612	644	600	632	100	-
SAC 320/W VDU	3x18W	612	632	600	620	100	-
SAC 420/W VDU	4x18W	612	632	600	620	100	-
SAC 240/W VDU	2x36W	1222	1239	598	612	90	-
SAC 340/W VDU	3x36W	1222	1254	598	632	102	-
SAC 440/W VDU	4x36W	1222	1242	600	620	100	-



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.