



Sustainable LED Lighting Solutions

Efficiency meets Responsibility

Benefits of LED Tube



Longer Lifespan

LED light bulbs can last ten thousands of hours, where as incandescent ones only last around 1,000 hours.



Energy Efficiency

LED lights use up to 50% less energy than standard fluorescent or halogen alternatives.



Eco-Friendly

LED light contain no toxic materials, help reduce CO2 emissions, and are 100% recyclable.




Safer to Use

- Eye-friendly
- Cool to the touch
- Sturdier build
- Mercury-free



Color & Design Flexibility

LEDs come in different adjustable brightness and color temperature.

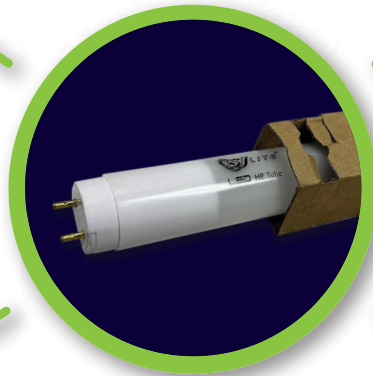

Compliance & Certificate



LED Tube (HE)

World Transformer of Energy Efficient and Cost Effective Solution

Approved by Suruhanjaya Tenaga (ST), SIRIM & JKR



Features

- Up to 50% energy saving compared to fluorescents
- Long lifetime up to 50,000hrs
- High quality polycarbonate material
- Easy installation
- No mercury material or UV radiation
- Low power consumption of 14W for a 4 foot unit
- Lumen Maintenance Factor: L(70)
- Failure Fraction: F(50) 50,000Hrs
- Flickering value (PstLM): 1
- Stroboscopic effect value (SVM): 0.4
- Photobiological safety according to IEC62471: RG0



Industrial



Hospitality



Retail



Office



Commercial



Residential


Warning Notice

- Do not replace conventional LFL directly with LED T8 tube.
- New Luminaire, LED T8 needs rewiring the fixture.
- LED T8 Tube only compatible with a magnetic ballast or direct connection to 200-240V, 50/60Hz mains supply.
- The lamp is not suitable to be used in emergency luminaires designed for double-capped fluorescent lamp(s).

Benefits

- Considerably lower energy cost
- Easy and flexibe installation
- Environmental friendly
- Excellent high power, high output and efficacy of over 130 lm/W

Dimension



Model No.	Colour Temp. (CCT)	Type	Lampholder	Input Voltage	B. Angle (°)	Power Factor (PF)	Power (W)	Lumen (lm)	Efficiency (lm/W)	Size (ØxH) (mm)
RLASJLP821123	3000K	Core Level 3	G13	200-240V 50/60Hz	160	>0.90	8	1100	138	26 x 588
RLASJLP821124	4000K									
RLASJLP821126	6500K									
RLASJLP842123	3000K						14	2100	150	26 x 1198
RLASJLP842124	4000K									
RLASJLP842126	6500K									
RLASJLP853423	3000K						23	3400	148	26 x 1500
RLASJLP853424	4000K									
RLASJLP853426	6500K									

* Dimming not allowed, not for use with electronic ballast gear.

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.





SONIC LED

SB T8 Bare Batten Series

Class I

CRI
>80

Power
Factor
>0.9

IP20


Application : Indoor application, corridors, staircase, walkway, lift lobby and schools.

Housing Material Cold Roll Steel


Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Mounting Surface / Wall / Suspension

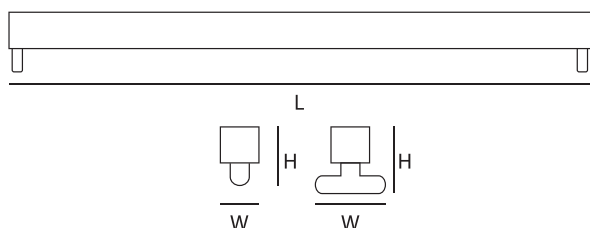

Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SB 1A 120	1	T8 LED Tube	612 x 54 x 87
SB 2A 220	2		612 x 100 x 87
SB 1C 140	1		1221 x 54 x 87
SB 2C 240	2		1221 x 100 x 87
SB 3C 340	3		1221 x 129 x 87



SONIC LED

SD T8 Daikon Diffuser Series

Class I

CRI
>80

Power
Factor
>0.9

IP20


Application : Indoor application, corridor, staircase, walkway, lift lobby and retails shop.

Housing Material Cold Roll Steel

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Mounting Surface / Wall / Suspension



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SD 1A 120	1	T8 LED Tube	630 x 66 x 92
SD 2A 220	2		635 x 120 x 102
SD 1C 140	1		1228 x 66 x 92
SD 2C 240	2		1244 x 120 x 102

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.






SONIC LED

SWG T8 Vandal Proof Batten Series

Class I	CRI >80	Power Factor >0.9	IP20
---------	---------	-------------------	------

Application : Car parks, staircase, loading bays, corridors and lift lobbies.

Housing Material	Cold Roll Steel
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Surface / Wall / Suspension



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SWG 1A 120	1	T8 LED Tube	629 x 81 x 109
SWG 2A 220	2		629 x 105 x 115
SWG 1C 140	1		1233 x 81 x 109
SWG 2C 240	2		1233 x 105 x 115




METEOR LED

Surface Mounted Sym Radius Series

Class I	CRI >80	Power Factor >0.9	IP20
---------	---------	-------------------	------

Application : Hotels, schools, government buildings, shopping complexes, offices, hospitals, condominiums and etc.

Housing Material	Cold Roll Steel
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Surface / Suspension



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SDM 1A 120	1	T8 LED Tube	683 x 292 x 65
SDM 2A 220 (1X2)	2		1293 x 190 x 65
SDM 1C 140 (1X4)	1		1293 x 292 x 65
SDM 2C 240 (1X4)	2		1293 x 292 x 65

*All LED component are subject to the LED component manufacturers warranty terms and condition.
*SJ Lite reserves the right to change and amend the specification without prior notice.






SONIC LED

SCR T8 Weatherproof Series


Class I	CRI >80	Power Factor >0.9	IP65
----------------	-----------------------------	---------------------------------------	-------------

Application : Car parks, loading bays, corridors, warehouses, workshops and laboratories.

Housing Material	Polycarbonate
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Surface / Wall / Suspension



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SCR 1A 120 (IP65)	1	T8 LED Tube	660 x 85 x 87
SCR 2A 220 (IP65)	2		660 x 134 x 87
SCR 1C 140 (IP65)	1		1269 x 85 x 87
SCR 2C 240 (IP65)	2		1269 x 134 x 87

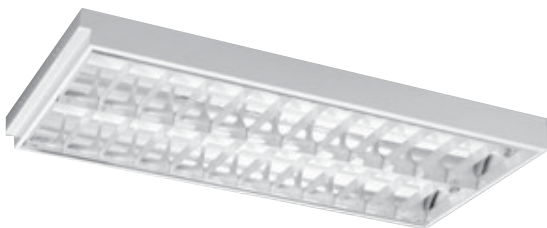


METEOR LED

SAC Recessed T-Bar Mounted - Mirror Louvre Fitting Series

Class I	CRI >80	Power Factor >0.9	IP20
----------------	-----------------------------	---------------------------------------	-------------

Application : Offices, supermarkets and complexes.

Housing Material	Cold Roll Steel
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Recessed



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 1A 120 MOL	1	T8 LED Tube	612 x 302 x 90
SAC 2A 220 MOL	2		612 x 600 x 90
SAC 3A 320 MOL	3		
SAC 4A 420 MOL	4		
SAC 1C 140 MOL	1		1222 x 302 x 90
SAC 2C 240 MOL (1X4)	2		
SAC 2C 240 MOL	2		1222 x 600 x 90
SAC 3C 340 MOL	3		
SAC 4C 440 MOL	4		

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.





METEOR LED

SAC Surface Mounted - Mirror Louvre Fitting Series

Class I

CRI
>80

Power
Factor
>0.9

IP20

Application : Offices, supermarkets and complexes.

Housing Material Cold Roll Steel

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Mounting Surface




Hospitality



Office



Retail



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 1A 120/S MOL	1	T8 LED Tube	612 x 302 x 90
SAC 2A 220/S MOL	2		612 x 598 x 90
SAC 3A 320/S MOL	3		
SAC 4A 420/S MOL	4		
SAC 1C 140/S MOL	1		1222 x 302 x 90
SAC 2C 240/S MOL (1X4)	2		
SAC 2C 240/S MOL	2		
SAC 3C 340/S MOL	3		
SAC 4C 440/S MOL	4		1222 x 598 x 90



METEOR LED

SAC Wood/Plaster Ceiling Mounted - Mirror Louvre Fitting Series

Class I

CRI
>80

Power
Factor
>0.9

IP20

Application : Offices, supermarkets and complexes.

Housing Material Cold Roll Steel

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Mounting Recessed




Hospitality



Office



Retail



610x570mm (2'x2')
1215x570mm (2'x4')
1215x280mm (1'x4')

Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 2A 220/W MOL	2	T8 LED Tube	636 x 620 x 90
SAC 3A 320/W MOL	3		
SAC 4A 420/W MOL	4		
SAC 2C 240/W MOL (1X4)	2		
SAC 2C 240/W MOL	2		1246 x 329 x 90
SAC 3C 340/W MOL	3		
SAC 4C 440/W MOL	4		
			1246 x 620 x 90

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.





AURORAS LED

SAC Recessed T-Bar Mounted - Hinged Diffused Series (HD)

Class I

CRI
>80

Power
Factor
>0.9

IP20

Application : Offices, supermarkets and complexes.

Housing Material Cold Roll Steel

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Mounting Recessed




Hospitality



Office



Retail



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 1A 120 (HD)	1	T8 LED Tube	612 x 302 x 90
SAC 2A 220 (HD)	2		612 x 600 x 90
SAC 3A 320 (HD)	3		
SAC 4A 420 (HD)	4		
SAC 1C 140 (HD)	1		1222 x 302 x 90
SAC 2C 240 (HD) (1X4)	2		
SAC 2C 240 (HD)	2		
SAC 3C 340 (HD)	3		
SAC 4C 440 (HD)	4		1222 x 600 x 90



AURORAS LED

SAC Surface Mounted - Hinged Diffused Series (HD)

Class I

CRI
>80

Power
Factor
>0.9

IP20

Application : Offices, supermarkets and complexes.

Housing Material Cold Roll Steel

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Mounting Surface




Hospitality



Office



Retail



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 1A 120/S (HD)	1	T8 LED Tube	612 x 302 x 90
SAC 2A 220/S (HD)	2		612 x 598 x 90
SAC 3A 320/S (HD)	3		
SAC 4A 420/S (HD)	4		
SAC 1C 140/S (HD)	1		1222 x 302 x 90
SAC 2C 240/S (HD)	2		
SAC 2C 240/S (HD)	2		
SAC 3C 340/S (HD)	3		
SAC 4C 440/S (HD)	4		1222 x 598 x 90

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.





AURORAS LED

SAC Wood/Plaster Ceiling Mounted - Hinged Diffused Series (HD)

Class I


CRI
>80

Power
Factor
>0.9

IP20

Application : Offices, supermarkets and complexes.

Housing Material	Cold Roll Steel
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Recessed

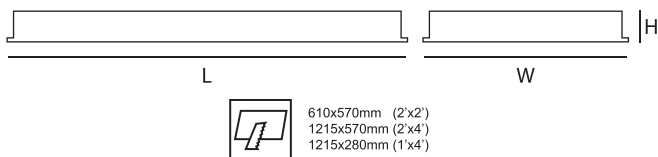

Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 1A 120/W (HD)	1	T8 LED Tube	644 x 334 x 97
SAC 2A 220/W (HD)	2		644 x 637 x 97
SAC 3A 320/W (HD)	3		
SAC 4A 420/W (HD)	4		
SAC 2C 240/W (HD) (1x4)	2		1254 x 334 x 97
SAC 2C 240/W (HD)	2		1254 x 637 x 97
SAC 3C 340/W (HD)	3		
SAC 4C 440/W (HD)	4		



AURORAS LED

SAC Recessed T-Bar Mounted - Clean Room Fitting Series (IP54)

Class I


CRI
>80

Power
Factor
>0.9

IP54

Application : Technical workshop, labrotories and supermarkets

Housing Material	Cold Roll Steel
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Recessed



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 1A 120 CRF (IP54)	1	T8 LED Tube	612 x 302 x 90
SAC 2A 220 CRF (IP54)	2		612 x 600 x 90
SAC 3A 320 CRF (IP54)	3		
SAC 4A 420 CRF (IP54)	4		
SAC 1C 140 CRF (IP54)	1		1222 x 302 x 90
SAC 2C 240 CRF (IP54)	2		1222 x 600 x 90
SAC 3C 340 CRF (IP54)	3		
SAC 4C 440 CRF (IP54)	4		

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.





AURORAS LED

SAC Surface Mounted - Clean Room Fitting Series (IP54)

Class I


CRI
>80

Power
Factor
>0.9

IP54

Application : Technical workshop, labrotories and supermarkets

Housing Material	Cold Roll Steel
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Surface



Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 1A 120/S CRF (IP54)	1	T8 LED Tube	612 x 302 x 90
SAC 2A 220/S CRF (IP54)	2		612 x 598 x 90
SAC 3A 320/S CRF (IP54)	3		
SAC 4A 420/S CRF (IP54)	4		
SAC 1C 140/S CRF (IP54)	1		1222 x 302 x 90
SAC 2C 240/S CRF (IP54)	2		1222 x 598 x 90
SAC 3C 340/S CRF (IP54)	3		
SAC 4C 440/S CRF (IP54)	4		



AURORAS LED

SAC Wood/Plaster Ceiling Mounted - Clean Room Fitting Series (IP54)

Class I


CRI
>80

Power
Factor
>0.9

IP54

Application : Technical workshop, labrotories and supermarkets

Housing Material	Cold Roll Steel
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Mounting	Recessed




610x570mm (2'x2')
1215x570mm (2'x4')
1215x280mm (1'x4')

Model No.	No. Of Lamp	Light Source	Size (LxWxH) (mm)
SAC 2A 220/W CRF (IP54)	2	T8 LED Tube	628 x 628 x 90
SAC 3A 320/W CRF (IP54)	3		
SAC 4A 420/W CRF (IP54)	4		
SAC 1C 140/W CRF (1X4) (IP54)	1		1254 x 334 x 90
SAC 2C 240/W CRF (IP54)	2		1239 x 612 x 90
SAC 3C 340/W CRF (IP54)	3		
SAC 4C 440/W CRF (IP54)	4		

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.



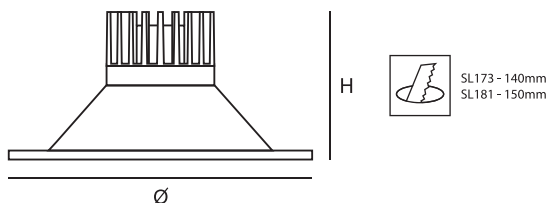

PLUTO LED


SL173/SL181 Downlight Series

Class I	CRI >80	Power Factor >0.9	IP20
----------------	-----------------------------	---------------------------------------	-------------

Application : Commercial building, offices, conference room, classrooms, shops and etc.

Housing Material	Die-cast Aluminum
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Total Harmonic Distortion	≤20%
Life Cycle	50,000hrs
Mounting	Recessed

Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (ØxH) (mm)
SL 173.10	10	804	81	3000K/4000K/ 6500K	160 x 60
SL 173.15	15	1210	84		
SL 181.10	10	971	95		188 x 98
SL 181.15	15	1282	88		
SL 181.20	20	2103	105		

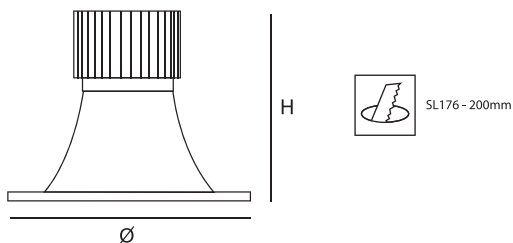

PLUTO LED


SL 176 Downlight Series

Class I	CRI >80	Power Factor >0.9	IP20
----------------	-----------------------------	---------------------------------------	-------------

Application : Commercial building, offices, conference room, classrooms, shops and etc.

Housing Material	Die-cast Aluminum
Input Voltage	240V, 50Hz
Operating Temperature	-20°C ~ +45°C
Total Harmonic Distortion	≤20%
Life Cycle	50,000hrs
Mounting	Recessed


Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (ØxH) (mm)
SL 176.20	20	2082	103	3000K/4000K/ 6500K	235 x 165



Retail



Commercial



PLUTO LED

SL 177 Downlight Series

Class I

CRI
>80

Power
Factor
>0.9

IP20

Application : Commercial building, offices, conference room, classrooms, shops and etc.

Housing Material Cold Roll Steel

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Total Harmonic Distortion ≤20%

Life Cycle 50,000hrs

Mounting Surface

Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (ØxH) (mm)
SL 177.4 (850LM)	11	850	77	3000K/4000K/ 6500K	160 x 155
SL 177.4 (1250LM)	15	1250	83		
SL 177.4 (2000LM)	20	2000	100		
SL 177.6 (2000LM)	20	2000	100		188 x 155
SL 177.6 (3000LM)	30	3000	100		
SL 177.6 (4000LM)	42	4000	95		188 x 205
SL 177.8 (5000LM)	50	5000	100		235 x 205
SL 177.8 (6000LM)	60	6000	100		235 x 255

PLUTO LED

SL 190 Downlight Series

Class II

CRI
>80

Power
Factor
>0.9

IP20

Application : Commercial building, offices, conference room, classrooms, shops and etc.

Housing Material Die-cast Aluminum

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Total Harmonic Distortion ≤20%

Life Cycle 50,000hrs

Mounting Recessed



Hospitality



Retail




Office



Commercial



Residential



SL190.4 - 105±2mm
SL190.6 - 155±2mm
SL190.8 - 205±2mm

Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (ØxH) (mm)
SL190.4 (10W)	10	1030	103	3000K/4000K/ 6500K	120 x 36
SL190.4 (12W)	12	1178	98		
SL190.6 (12W)	12	1277	106		
SL190.6 (15W)	15	1510	101		170 x 36
SL190.6 (20W)	20	2095	105		
SL190.8 (20W)	20	2134	107		
SL190.8 (23W)	23	2390	104		223 x 37

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.






Industrial



Commercial



Sport

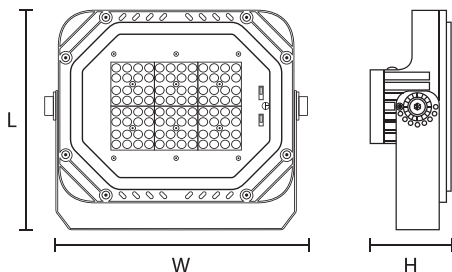

NEPTUNE LED

SL 301 Floodlight Series

Class I

CRI
>80

Power
Factor
>0.9

IP65

Application : Buildings, advertising boards, parks, plaza, dock and greenwood.

Housing Material Die-cast Aluminum

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Total Harmonic Distortion ≤20%

Life Cycle 50,000hrs

Mounting Ground / Wall

Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (LxWxH) (mm)
SL 301.60	60	7800	130	3000K/4000K/6500K	246 x 303 x 96
SL 301.100	100	12500			308 x 385 x 110
SL 301.150	150	19000			308 x 385 x 110
SL 301.200	200	26000			355 x 438 x 128




Industrial



Commercial



Sport

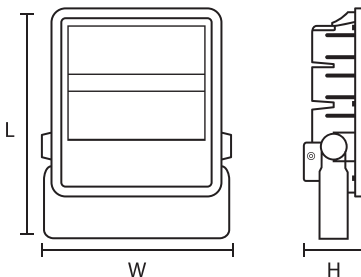

NEPTUNE LED

SL 307 Floodlight Series

Class I

CRI
>70

Power
Factor
>0.9

IP65

Application : Buildings, advertising boards, parks, plaza, dock and greenwood.

Housing Material Die-cast Aluminum

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Total Harmonic Distortion ≤20%

Life Cycle 50,000hrs

Mounting Ground / Wall

Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (LxWxH) (mm)
SL 307.65	60	5100	123	3000K/4000K/6500K	352 x 259 x 54
SL 307.100	100	12650	127		398 x 282 x 59
SL 307.150	152	19100	126		448 x 371 x 63
SL 307.200	203	25250	124		445 x 510 x 67
SL 307.300	300	36000	120		535 x 515 x 69

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.






Industrial



Retail

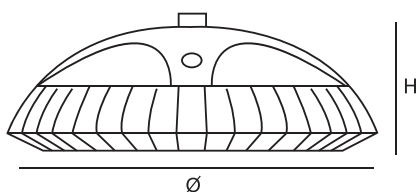

URANUS LED

SL 407 Highbay Series

Class I

CRI
>80

Power
Factor
>0.9

IP65

Application : Manufacturing plants, multi-purpose halls, industrial areas and warehouses.

Housing Material Die-cast Aluminum

Input Voltage 220-240V, 50/60Hz

Operating Temperature -20°C ~ +45°C

Total Harmonic Distortion ≤20%

Life Cycle 50,000hrs

Mounting Suspension


Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (ØxH) (mm)
SL 407.100	98	16000	163	3000K/4000K/ 6500K	360 x 135
SL 407.150	145	23000	159		360 x 135
SL 407.200	198	33000	167		420 x 150



Industrial



Retail

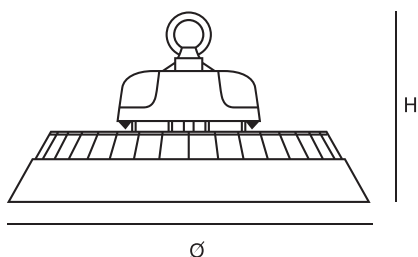

URANUS LED

SL 418 Highbay Series

Class I

CRI
>80

Power
Factor
>0.9

IP65

Application : Manufacturing plants, multi-purpose halls, industrial areas and warehouses.

Housing Material Die-cast Aluminum

Input Voltage 240V, 50Hz

Operating Temperature -20°C ~ +45°C

Total Harmonic Distortion ≤20%

Life Cycle 50,000hrs

Mounting Suspension


Model No.	Power (W)	Lumen (lm)	Efficiency (lm/W)	Colour Temp. (CCT)	Size (ØxH) (mm)
SL 418.60	60	7800	130	4000K/5000K/ 5700K/6500K	230 x 122
SL 418.100	100	12500	125		270 x 125
SL 418.150	150	19000	127		330 x 140
SL 418.200	200	26000	130		380 x 145

*All LED component are subject to the LED component manufacturers warranty terms and condition.

*SJ Lite reserves the right to change and amend the specification without prior notice.




ACCESSORIES

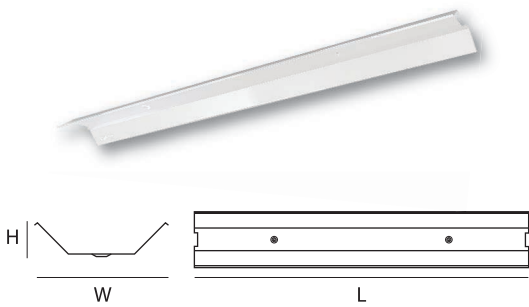

Metal Reflector

Body Material	Metal
Thickness	0.4mm


Model No.	L(MM)	W(MM)	H(MM)
SMR 120/ N	610	166	40
SMR 140/ N	1221	166	40
SMR 220/ N	610	207	49
SMR 240/ N	1221	207	49
SMR 158/ N	1521	166	40
SMR 258/ N	1521	207	49

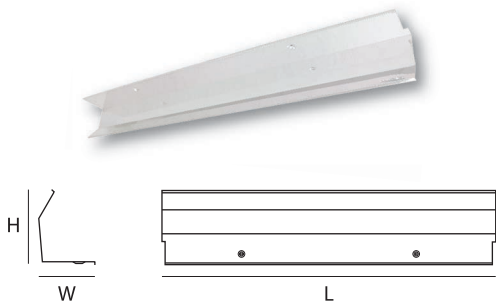

Metal Angle Reflector

Body Material	Metal
Thickness	0.4mm


Model No.	L(MM)	W(MM)	H(MM)
SMR 120/ HN	610	63	134
SMR 140/ HN	1221	63	134
SMR 220/ HN	610	107	160
SMR 240/ HN	1221	107	160
SMR 258/ HN	1521	107	160

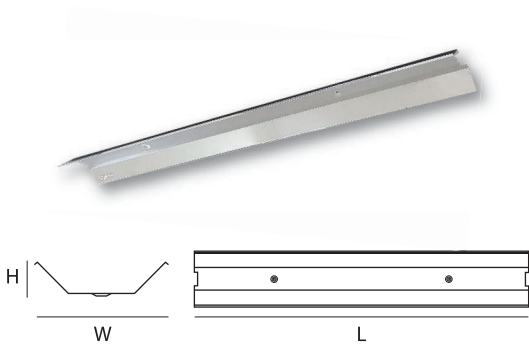

Aluminium Reflector

Body Material	Aluminium
Thickness	0.4mm


Model No.	L(MM)	W(MM)	H(MM)
SAR 120/ N	610	166	40
SAR 140/ N	1221	166	40
SAR 220/ N	610	207	49
SAR 240/ N	1221	207	49
SAR 158/ N	1521	166	40
SAR 258/ N	1521	207	49

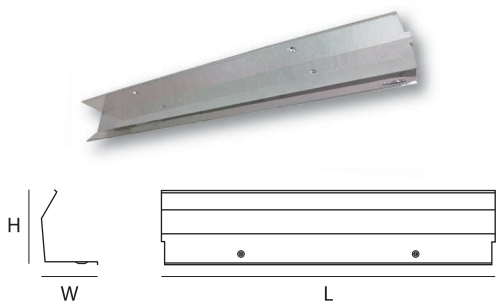

Aluminium Angle Reflector

Body Material	Aluminium
Thickness	0.4mm

Model No.	L(MM)	W(MM)	H(MM)
SAR 120/ HN	610	63	134
SAR 140/ HN	1221	63	134
SAR 220/ HN	610	107	160
SAR 240/ HN	1221	107	160
SAR 258/ HN	1521	107	160

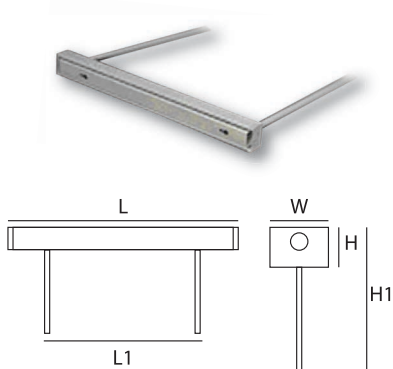

Suspension Rod

Body Material	Heavy Gauge Sheet Steel
Paintwork	High Gloss White Epoxy Polyester Powder

Model No.	L(MM)	L1(MM)	W(MM)	H(MM)	H1(MM)
SSR 12"	512	457	50	33	330
SSR 18"	512	457	50	33	485
SSR 24"	512	457	50	33	635
SSR 36"	512	457	50	33	945
SSR 48"	512	457	50	33	1245
SSR 60"	512	457	50	33	1555

*All LED component are subject to the LED component manufacturers warranty terms and condition.
*SJ Lite reserves the right to change and amend the specification without prior notice.





SIRIJAYA

(Corporate Office)

SIRIJAYA HOLDINGS BERHAD

201001042568 (Co. No. 926496-T)

No.9, Lebuhr Perusahaan Klebang 9, IGB International Industrial Park, 31200 Chemor, Perak Darul Ridzuan.
Tel : +605-292 3888 (Hunting Line), 291 2223, 291 2225, 291 2226, 291 2228 Fax : +605-291 2221, 291 2222
Email : marketing@sirijaya.com
Website : www.sirijaya.com

(Malaysia's Sales & Marketing)

SNJ LITE TRADING SDN. BHD.

199501042498 (Co. No. 371702-K)

No.9, Lebuhr Perusahaan Klebang 9, IGB International Industrial Park, 31200 Chemor, Perak Darul Ridzuan.
Tel : +605-292 3888 (Hunting Line), 291 2223, 291 2228 Fax : +605-291 2221, 2912222
Email : marketing@sirijaya.com
Website : www.sirijaya.com

(Malaysia's Subsidiaries / Factories)

SIRIJAYA INDUSTRIES SDN. BHD.

198601004670 (Co. No. 153828-D)

No.9, Lebuhr Perusahaan Klebang 9, IGB International Industrial Park, 31200 Chemor, Perak Darul Ridzuan.
Tel : +605-292 3888 (Hunting Line), 291 2223, 291 2228 Fax : +605-291 2221, 2912222
Email : marketing@sirijaya.com
Website : www.sirijaya.com

SNJ PROJECT SDN. BHD.

200801017186 (Co. No. 818479-U)

57-1 & 59-1, Jalan PJU 1/37, Block G, Dataran Prima, 47301, Petaling Jaya, Selangor, Malaysia
Tel : +603-7880 3634 Fax : +603-7880 3179
Email : marketing@sirijaya.com

SJ LITE TECHNOLOGY SOLUTIONS SDN. BHD.

201701013577 (Co. No. 1227742-U)

57-1 & 59-1, Jalan PJU 1/37, Block G, Dataran Prima, 47301, Petaling Jaya, Selangor, Malaysia
Tel : +603-7880 3634 Fax : +603-7880 3179
Email : sjtech@sirijaya.com
Website : www.sirijaya.com

SIRIJAYA METAL SDN. BHD.

200901031523 (Co. No. 874633-U)

No.9, Lebuhr Perusahaan Klebang 9, IGB International Industrial Park, 31200 Chemor, Perak Darul Ridzuan.
Tel : +605-292 3888 (Hunting Line), 291 2223, 291 2228 Fax : +605-291 2221, 2912222
Email : sjtrunk@sirijaya.com
Website : metal.sirijaya.com

(Singapore's Subsidiary)

SJ LITE SINGAPORE PTE. LTD.

(Co. No. 200609376-E)

12 Tagore Drive #02-02 Singapore 787621
Tel : +65-6844 3887 Fax : +65-6744 3886
Email: sjlite@singnet.com.sg



www.sirijaya.com