



COMET LED

SL 270 Track Spotlight Series

Features

Adjustable track spotlight providing great flexibility to directional lighting.

Applications

Ideal for commercial building, lobby, conventional hall, ballroom and concourse.


Optics

Diffuser Material	Clear PMMA
Beam Angle	15° / 24° / 36°

Optional Features / Accessories

Dali/1-10V Dimming Control
Track Rail - 1m/2m/3m

Mounting





Specifications


Model	SL 270 (5W)	SL 270 (9W)	SL 270 (14W)
Nominal Power	5.6W	9W	13.5W
Nominal System Lumen Output	855 lm	1360 lm	1810 lm
	900 lm	1430 lm	1905 lm
	925 lm	1475 lm	1960 lm
	935 lm	1490 lm	1980 lm
Nominal System Efficacy	172 lm/W	159 lm/W	147 lm/W
	181 lm/W	167 lm/W	154 lm/W
	186 lm/W	172 lm/W	159 lm/W
	188 lm/W	174 lm/W	161 lm/W
Model	SL 270 (19W)	SL 270 (24W)	SL 270 (27W)
Nominal Power	18.5W	22.5W	26.5W
Nominal System Lumen Output	2730 lm	3185 lm	3615 lm
	2875 lm	3355 lm	3805 lm
	2960 lm	3455 lm	3915 lm
	2990 lm	3485 lm	3955 lm
Nominal System Efficacy	162 lm/W	156 lm/W	150 lm/W
	171 lm/W	164 lm/W	158 lm/W
	176 lm/W	169 lm/W	162 lm/W
	178 lm/W	170 lm/W	164 lm/W
Model	SL 270 (34W)	SL 270 (41W)	SL 270 (49W)
Nominal Power	34.1W	40.2W	46.5W
Nominal System Lumen Output	4635 lm	5210 lm	5730 lm
	4880 lm	5485 lm	6030 lm
	5025 lm	5645 lm	6210 lm
	5075 lm	5700 lm	6270 lm
Nominal System Efficacy	150 lm/W	142 lm/W	135 lm/W
	158 lm/W	150 lm/W	142 lm/W
	162 lm/W	154 lm/W	147 lm/W
	164 lm/W	156 lm/W	148 lm/W
LED Driver	VS Type ECXe		
Light Source	Comfort COB		
Colour Temperature (CCT)	2700K/3000K/4000K/5700K		
Input Voltage	220-240V, 50/60Hz		
Colour Rendering Index (CRI)	>80		
Luminaire Rated Life	50,000hr (L80/B10)		
Operating Temperature	-20°C ~ +40°C		
Power Factor	≥0.95PF		
Total Harmonic Distortion	<25%		
Insulation Class	Class I		
Housing Material	Die-cast Aluminium		
Ingress Protection	IP20		




Order Reference

Model	Wattage	
SL 270	5	27
	9	34
	14	41
	19	49
	24	

Example :



Dimensions

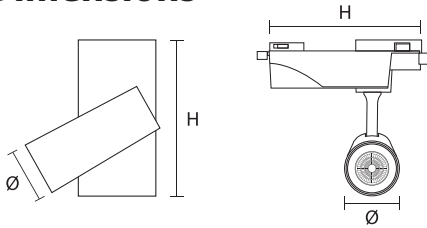

Order Information

Model No.	Ø(mm)	H(mm)
SL 270 (5W)	50	110
SL 270 (9W)	50	110
SL 270 (14W)	50	110
SL 270 (19W)	60	140
SL 270 (24W)	60	140
SL 270 (27W)	80	160
SL 270 (34W)	80	160
SL 270 (41W)	90	170
SL 270 (49W)	90	170

Note : Subject to +/- 1.5mm

*Other various types are available upon request.