





Adjustable recessed downlight in die-casting aluminium. High Intensity Discharge Fittings. With fixed tempered UV filter glass. Suitable for commercial halls, offices, museums, galleries, exhibition, etc.

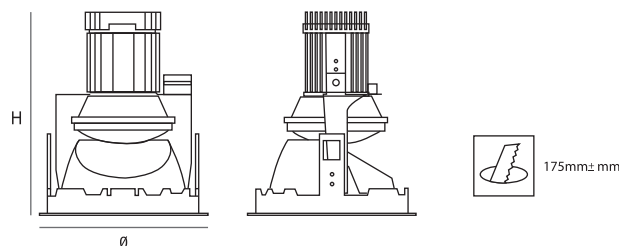

TM5 Utilization Factors

Utilization factors			LOR =73.0%			DLOR =73.0%			ULOR =0.0%		
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	63	68	71	73	75	77	78	80	81
	0.3		60	65	68	70	73	75	76	78	79
0.5	0.1	0.2	58	63	66	68	71	73	75	77	78
	0.5		62	67	69	71	73	75	76	77	78
	0.3		60	64	67	69	71	73	74	76	77
0.3	0.1	0.2	58	62	65	67	70	72	73	75	76
	0.5		62	65	68	69	71	73	73	74	75
	0.3		59	63	66	68	70	71	72	74	74
0.0	0.1	0.0	57	61	64	66	69	70	71	73	74
	0.0		56	60	63	63	66	68	68	70	70
			SHR NOM =0.50 SHR MAX =0.65 SHR MAX TR 0.65								

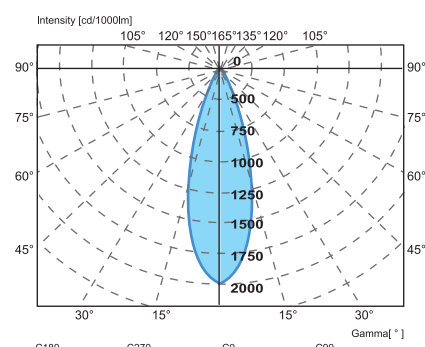

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body & Ring	Made of injected die-cast aluminium.
Reflector	High quality specular/matt finish aluminium.
Paintwork	Coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	CDMT.
Electrical Data	240V, 50Hz
Wattage	70W/150W
Wire	Silicone heat resistance cable.
Ballast	70W/150W
Lampholder	G12
Control Gear Box	Separate

Dimensions Ø190(MM) H230(MM)

MODEL NO.	NO. OF LAMP
PLUTO 310.070CDM-T	1X 70W
PLUTO 310.150CDM-T	1X150W

MODEL NO.	NO. OF LAMP



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.