





Fixed recessed downlight for halogen lamp with deep set lamp to avoid glare & ensure comfortable lighting. Suitable for offices, commercial halls, museums, galleries, exhibitions, etc.

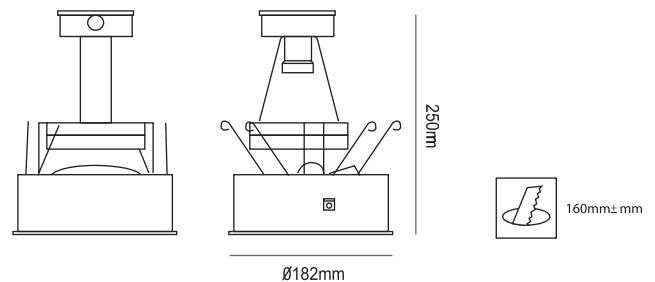

TM5 Utilization Factors

Utilization factors			LOR=84.4%			DLOR=84.4%			ULOR=0.0%		
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	69	75	79	82	85	88	89	91	93
	0.3		65	71	75	78	82	85	87	89	91
	0.1		62	68	72	75	80	83	85	88	89
0.5	0.5	0.2	68	73	77	80	83	85	86	88	89
	0.3		64	70	74	77	80	83	84	86	88
	0.1		61	67	71	74	78	81	83	85	87
0.3	0.5	0.2	67	72	75	78	81	82	84	85	86
	0.3		64	69	73	75	79	81	82	84	85
	0.1		61	67	71	73	77	79	81	83	84
0.0	0.0	0.0	60	65	69	71	74	76	77	79	80
			SHR NOM =0.75			SHR MAX =0.95			SHR MAX		
			TR =0.95								

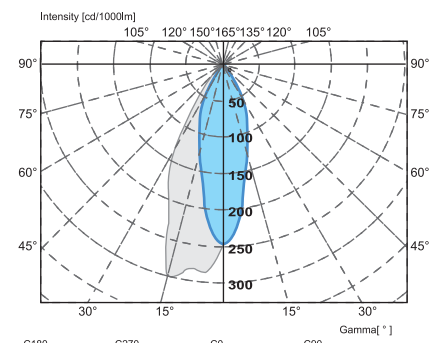

Photometry result or data are available for interior lux calculation upon requisition. the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body & Ring	Made of compress cold rolled steel.
Paintwork	Coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	PAR 38/CDM-R 70W/Halogen A-Pro 75W.
Electrical Data	240V, 50Hz
Lampholder	E27

Dimensions Ø110 H25(MM)

[illegible][illegible]

Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.