




Specifications

Model	SAC 2A 220/W (HD)	SAC 3A 320/W (HD)	SAC 2C 240/W (HD) (1X4)	SAC 2C 240/W (HD)	SAC 3C 340/W (HD)
Nominal System Lumen Output	1560 lm	2340 lm	2872 lm	3343 lm	4967 lm
Nominal System Efficacy	96 lm/W	96 lm/W	103 lm/W	117 lm/W	117 lm/W
Light Source	T8 LED Tube				
Colour Temperature (CCT)	3000K/4000K/6500K				
Input Voltage	240V,50Hz				
Colour Rendering Index (CRI)	>80				
Luminaire Rated Life	50,000hrs (L70B50)				
Operating Temperature	-20°C~+45°C				
Power Factor	>0.9				
Total Harmonic Distortion	≤20%				
Insulation Class	Class I				
Housing Material	Cold Roll Steel				
Ingress Protection	IP20				

Order Reference

Model	Quantity Of Tube	Length Of Tube
SAC	1	A (2ft)
	2	C (4ft)
	3	

Example :

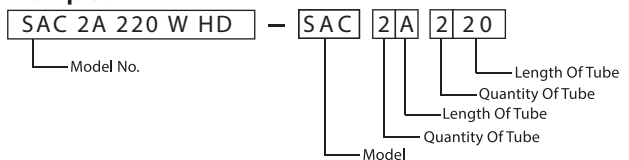

Order Information

Model No.	No. Of Lamp	Nominal Power(W)	L(mm)	W(mm)	H(mm)
SAC 2A 220/W (HD)	2	16	636	620	90
SAC 3A 320/W (HD)	3	24	636	620	90
SAC 2C 240/W (HD) (1X4)	2	28	1246	329	90
SAC 2C 240/W (HD)	2	28	1246	620	90
SAC 3C 340/W (HD)	3	42	1246	620	90

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

