



ECLIPSE LED

SEU Surface/Suspended Mounted LED Linear Diffused Series

Features

Aesthetically designed LED Linear Series suitable for suspended downward type with housing made from high-quality extruded aluminium. It provides low-glare illumination and can be installed as a standalone unit or as a continuous modular units.



White

Applications

Ideal for offices, schools, commercial, hospital, department stores and hypermarkets.

Optics

Diffuser Material	PMMA
Diffuser Pattern	Frosted



Suspension Kits



Surface Mounting Brackets

Optional Features / Accessories

Dali/1-10V Dimming Control


Suspension Kits

Surface Mounting Brackets

Mounting



Lighting Data

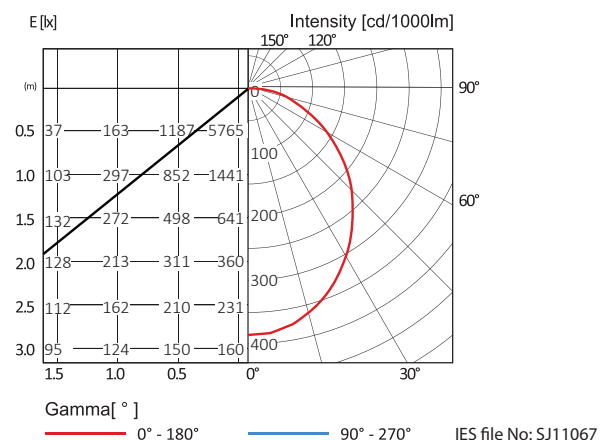



Specifications

Model	SEU A5	SEU B5
Nominal Power	18 W	34 W
Nominal System Lumen Output	1800 lm	3700 lm
Nominal System Efficacy	100 lm/W	108 lm/W
LED Driver	Tridonic LC	
Light Source	Tridonic LLE	
Colour Temperature (CCT)	3000K/4000K/6500K	
Input Voltage	240V~50Hz	
Colour Rendering Index (CRI)	>80	
Luminaire Rated Life	50,000hrs (L70B50)	
Operating Temperature	-20°C ~ +45°C	
Power Factor	>0.9PF	
Total Harmonic Distortion	≤20%	
Insulation Class	Class I	
Housing Material	Extruded Aluminium	
Ingress Protection	IP20	

Order Reference

Model	Number Of Module	Brand Of Component	Example :	
SEU	A (1 module) B (2 modules)	4 - Philips 5 - Tridonic	SEU A5	SEU A5
			Model No.	Brand Of Component Number Of Module
				Model

Order Information

Model No.	L(mm)	W(mm)	H(mm)
SEU A5	568	50	75
SEU B5	1128	50	75

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

