



# AURORAS

## ECO SAC T8 Cleanroom Fitting Series (IP54)

### Features

Designed for recessed mounting ceiling. Diffuser designed in normal hinged type for easy maintenance. Provided even light distribution, glare control and maximum light transmission. Optional convert to IP54 rating type with gasket to prevent the build-up of dust and dirt. Mainly used for technical workshop, laboratories, offices and supermarkets.


### Application

Ideal for offices, retail stores, stores, supermarkets, schools, hotels, factories, car parks and other indoor places to use.

### Luminaire Product Description


Mounting	Recessed
Housing Material	Cold Roll Sheet
Light Source	SJLITE ECO Glass Tube HO
Wire	HR 105°C
Power Supply	240V 50Hz
Power Factor	0.9
Ingress Protection	IP54
Insulation Classification	Class I

### Wiring Diagram

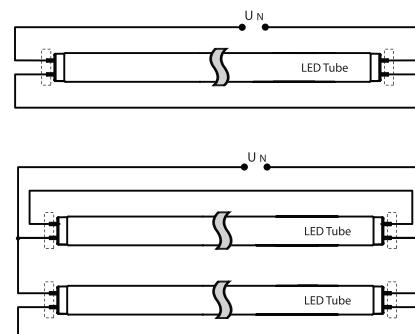

### Optics

Diffuser Material	Polystyrene
Diffuser Pattern	Wide choice of diffuser type for selection



Acrylic (Prismatic)



Acrylic (Opal)




Acrylic (Clear)

### Control

\*Option Accessories      Power pack




## Dimension

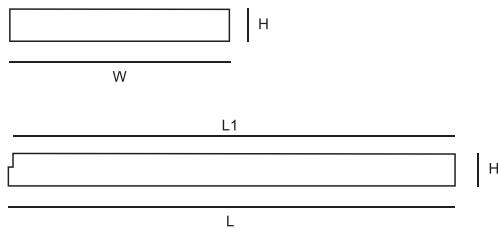

## Order Reference

Model	Quantity Of Tube	Length Of Tube
ECO SAC	1	A (2ft)
	2	C (4ft)
	3	
	4	

### Example :

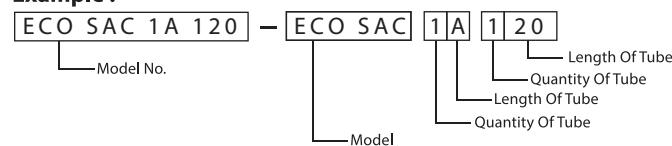

## Order Information

Model No.	No. Of Lamp	L(mm)	L1(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
ECO SAC 2A 220 CRF (1x2) (IP54)	2	612	600	302	-	90	-
ECO SAC 2A 220 CRF (IP54)	2			600			
ECO SAC 3A 320 CRF (IP54)	3		1210	302			
ECO SAC 4A 420 CRF (IP54)	4			600			
ECO SAC 2C 240 CRF (1x4) (IP54)	2	1222	1210	302	-	-	-
ECO SAC 2C 240 CRF (IP54)	2			600			
ECO SAC 3C 340 CRF (IP54)	3						

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.