



AURORAS

ECO SAC T8 HD Fitting Series

Features

Designed for exposed T-bar ceiling grid. Diffuser designed in normal hinged for either side for easy maintenance. Provided even light transmission, combined with a very low luminosity at angle approaching the horizontal surface. This range was designed to minimize glare and maximize light output and visual comfort together with a good degree of protection.

Luminaire Product Description

Mounting	Recessed
Housing Material	Cold Roll Steel
Coating	Epoxy Polyester Powder
Light Source	SJLITE ECO Glass Tube HO
Input Voltage	240V~, 50Hz
Power Factor	>0.9
Ingress Protection	IP20
Insulation Classification	Class I

Optics

Diffuser Material	Polystyrene
Diffuser Type	Wide choice of diffuser type for selection



Acrylic (Prismatic)


Acrylic (Opal)

Acrylic (Clear)

Application

Suitable for locations where good horizontal illumination is important.

Wiring Diagram

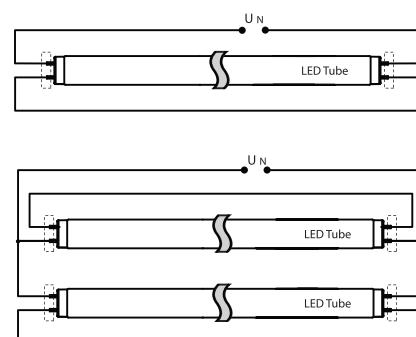


Control

*Dimming Option Fixed Output




Dimension

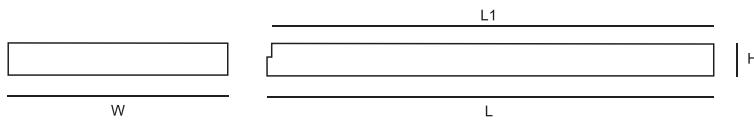

Order Reference

Model	Quantity Of Tube	Length Of Tube
ECO SAC	1	A (2ft)
	2	C (4ft)
	3	
	4	

Example :

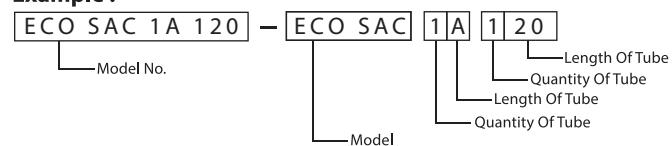

Order Information

Model No.	No. Of Lamp	L(mm)	L1(mm)	W(mm)	H(mm)
ECO SAC 2A 220 (HD)	2	612	600	600	90
ECO SAC 3A 320 (HD)	3				
ECO SAC 4A 420 (HD)	4				
ECO SAC 2C 240 (HD)	2		1210	600	
ECO SAC 3C 340 (HD)	3				

Note : Subject to +/- 1.5mm

*Other various types are available upon request.