



METEOR LED

ECO SAC T8 Mirror Optic Louvre Fitting Series (Wood/Plaster Ceiling)

Features

Designed for direct recess mounting on wood or plaster ceiling with single parabolic mirror optic louvre with christmas profile cross blades. Louvres reflection by means of slide lock set and can be lowered and hang from either side


Application

Mainly used for general lighting in offices, supermarkets and complexes.

Luminaire Product Description

| | |
|---------------------------|--------------------------|
| Mounting | Wood/Plaster |
| Housing Material | Cold Roll Steel |
| Coating | Epoxy Polyester Powder |
| Light Source | SJLITE ECO Glass Tube HO |
| Input Voltage | 240V~, 50Hz |
| Power Factor | >0.9 |
| Ingress Protection | IP20 |
| Insulation Classification | Class I |

Wiring Diagram

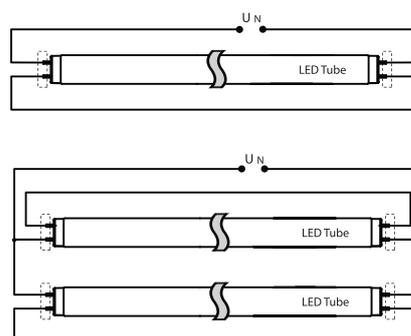


Optics

| | |
|-----------------|---------------------------------|
| Louvre Material | High Quality Anodised Aluminium |
| Louvre Type | Specular |

Control

*Dimming Option Fixed Output

Dimension

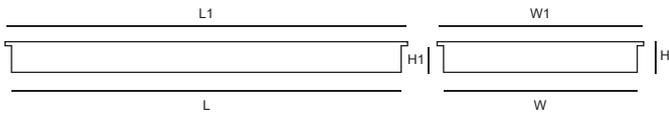



 610x570mm (2'x2')
 1215x570mm (2'x4')
 1215x280mm (1'x4')

Order Reference

| Model | Quantity Of Tube | Length Of Tube |
|---------|------------------|----------------|
| ECO SAC | 1 | A (2ft) |
| | 2 | C (4ft) |
| | 3 | |
| | 4 | |

Example :

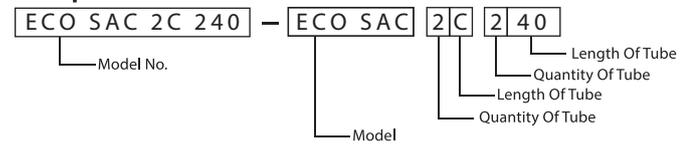

Order Information

| Model No. | No. Of Lamp | L(mm) | L1(mm) | W(mm) | W1(mm) | H(mm) | H1(mm) |
|----------------------------|-------------|-------|--------|-------|--------|-------|--------|
| ECO SAC 2A 220/W MOL | 2 | 612 | 636 | 598 | 620 | 90 | 78 |
| ECO SAC 1C 140/W MOL | 1 | 1222 | 1246 | 270 | 329 | | |
| ECO SAC 2C 240/W MOL (1x4) | 2 | | | | | | |
| ECO SAC 2C 240/W MOL | 2 | | | 561 | 620 | | |
| ECO SAC 3C 340/W MOL | 3 | | | | | | |

Note : Subject to +/- 1.5mm

*Other various types are available upon request.