



SONIC LED

SCR T8 Weatherproof Series

Features

IP 65 weatherproof light fitting is a durable, robust polycarbonate base and diffuser. Gear tray retaining strap for easy installation and maintenance. Knockout and IP gland supplied for connections and through wiring. Use only the fixing brackets supplied, screws should not be used directly through the base.

Applications


Ideal for car parks, loading bays, corridors, warehouses, workshops and laboratories.

Control


Dimming Fixed Output



Mounting



Lighting Data

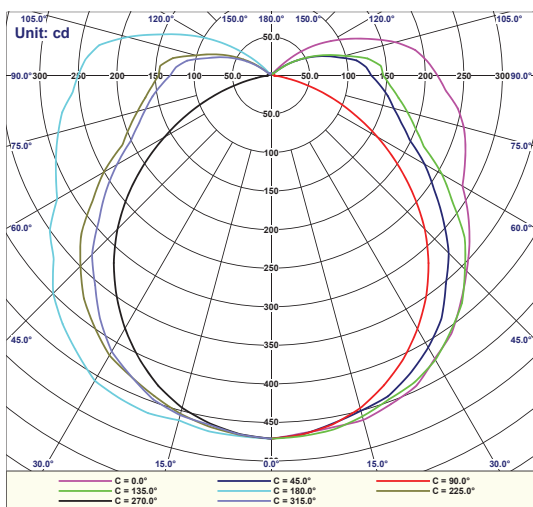

Luminous intensity values are shown radially from centre.
Elevation angle values are shown around the outside of the graph.
Report Number: (JOB NO : 2024EB0325)

TM5 Utilisation Factor Table

Reflectance			Room Index (K)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.51	0.59	0.66	0.71	0.78	0.82	0.86	0.91	0.94
0.70	0.30	0.20	0.43	0.51	0.58	0.63	0.71	0.76	0.80	0.86	0.89
0.70	0.10	0.20	0.38	0.45	0.52	0.57	0.65	0.71	0.75	0.81	0.85
0.50	0.50	0.20	0.48	0.55	0.61	0.66	0.72	0.76	0.79	0.84	0.87
0.50	0.30	0.20	0.41	0.48	0.55	0.59	0.66	0.71	0.75	0.80	0.83
0.50	0.10	0.20	0.36	0.43	0.49	0.54	0.61	0.67	0.70	0.76	0.80
0.30	0.50	0.20	0.45	0.51	0.57	0.61	0.67	0.71	0.73	0.77	0.80
0.30	0.30	0.20	0.39	0.45	0.52	0.56	0.62	0.66	0.70	0.74	0.77
0.30	0.10	0.20	0.35	0.41	0.47	0.51	0.58	0.63	0.66	0.71	0.74
0.00	0.00	0.00	0.31	0.36	0.42	0.46	0.52	0.56	0.59	0.63	0.66
Distribution Factors		Floor:	0.31	0.36	0.42	0.46	0.52	0.56	0.59	0.63	0.66
		Wall:	0.53	0.47	0.42	0.38	0.32	0.28	0.25	0.21	0.18
		Ceiling:	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
BZ Numbers:			5	5	6	6	6	6	6	6	6

SHR Nominal = 1.50:1 SHR Maximum = 1.57:1




Specifications

Model	SCR 1A 120 (IP65)	SCR 2A 220 (IP65)	SCR 1C 140 (IP65)	SCR 2C 240 (IP65)
Nominal System Lumen Output	965 lm	1640 lm	1970 lm	3643 lm
Nominal System Efficacy	119 lm/W	104 lm/W	140 lm/W	131 lm/W
Light Source	T8 LED Tube			
Colour Temperature (CCT)	3000K/4000K/6500K			
Input Voltage	240V,50Hz			
Colour Rendering Index (CRI)	>80			
Luminaire Rated Life	50,000hrs (L70B50)			
Operating Temperature	-20°C~+45°C			
Power Factor	>0.9			
Total Harmonic Distortion	≤20%			
Insulation Class	Class I			
Housing Material	Polycarbonate			
Ingress Protection	IP65			

Order Reference

Model	Quantity Of Tube	Length Of Tube
SCR	1	A (2ft)
	2	C (4ft)

Example :

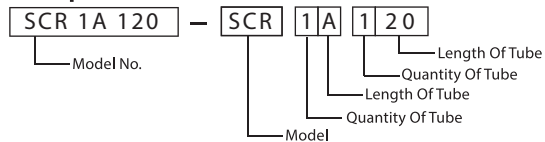

Order Information

Model No.	No. Of Lamp	Nominal Power(W)	L(mm)	W(mm)	H(mm)
SCR 1A 120 (IP65)	1	8	660	85	87
SCR 2A 220 (IP65)	2	16	660	134	87
SCR 1C 140 (IP65)	1	14	1269	85	87
SCR 2C 240 (IP65)	2	28	1269	134	87

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

