

ECLIPSE LED

SEC Surface/Suspended Mounted
LED Linear Curve Series

Features

Curve shape combines with parabolic louvre for an efficient profile with better glare control and bat wing light distribution. Curvelite can also be supplied in a continuous run configuration.

Applications

Ideal for general lighting in offices, supermarkets and complexes.


Optics

Diffuser Material	PMMA
Diffuser Pattern	Frosted
Louvre Material	Specular Anodised Aluminium


Optional Features / Accessories

Dali/1-10V Dimming Control

Mounting



Lighting Data

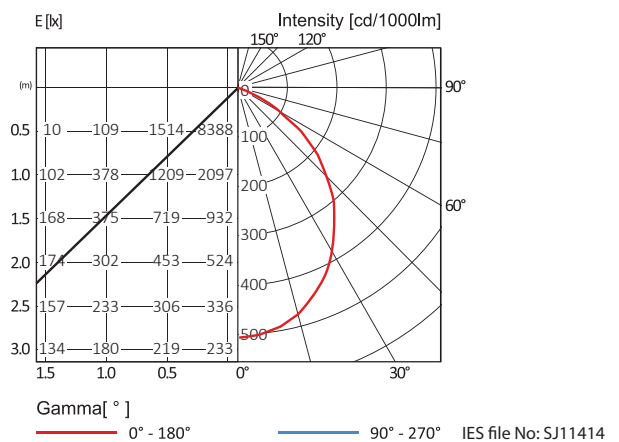




Specifications

Model	SEC B5	
Nominal Power	24W	34W
Nominal System Lumen Output	3150 lm	4180 lm
Nominal System Efficacy	131 lm/W	123 lm/W
LED Driver	Tridonic LC	
Light Source	Tridonic LLE	
Colour Temperature (CCT)	3000K/4000K/6500K	
Input Voltage	240V~50Hz	
Colour Rendering Index (CRI)	>80	
Luminaire Rated Life	50,000hrs (L70B50)	
Operating Temperature	-20°C ~ +45°C	
Power Factor	>0.9PF	
Total Harmonic Distortion	≤20%	
Insulation Class	Class I	
Housing Material	Extruded Aluminium	
Ingress Protection	IP20	

Order Reference

Model	Number Of Module	Brand Of Component
SEC	A (1 module)	4 - Philips
	B (2 modules)	5 - Tridonic
	C (3 modules)	7 - Osram
	D (4 modules)	

Example :

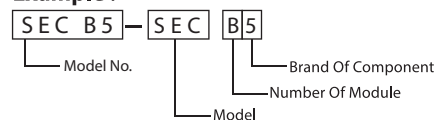

Order Information

Model No.	L(mm)	W(mm)	H(mm)
SEC B5	1128	160	70

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

