

URANUS LED

SL 423 Highbay Series

Features

The unique designed LED UFO Highbay offers maximum durability and reliability. It features field-selectable wattage and CCT, making it adaptable for a wide range of applications.

Applications

Ideal for supermarket, factories, warehouse and etc.


Optics

Material	PC optical lens
Beam Angle	90°x90°

Optional Features / Accessories

- _____ Dali/1-10V Dimming Control
- _____ Suspension Mounting Kit
- _____ Stainless Steel Spring Hook
- _____ Surface Mounting Bracket
- _____ Safety Chain


Mounting

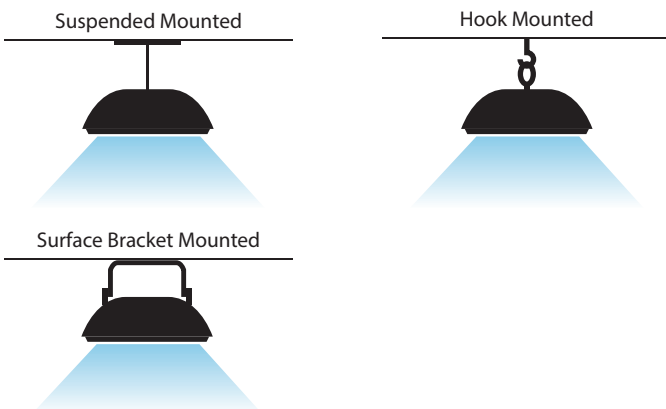

Accessories Option



Lighting Data

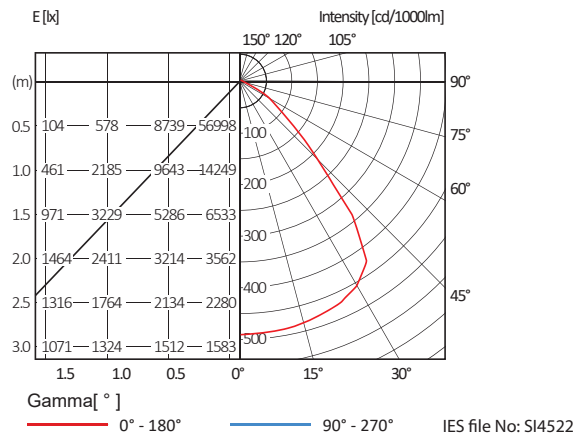



Specifications

Model	SL 423	
Nominal Power	100W/150W/200W	
Nominal System Lumen Output	14,000 lm/21,000 lm/28,000 lm	14,500 lm/21,750 lm/29,000 lm
Nominal System Efficacy	140 lm/W	145 lm/W
LED Driver	SOSEN	
Light Source	SMD 2835	
Colour Temperature (CCT)	3000K	4000K/6500K
Input Voltage	220-240V ~ 50/60Hz	
Colour Rendering Index (CRI)	>80	
Luminaire Rated Life	50,000hrs	
Operating Temperature	-20°C~+50°C	
Power Factor	>0.95PF	
Total Harmonic Distortion	≤20%	
Insulation Class	Class I	
Housing Material	Die Cast Aluminum	
Ingress Protection	IP65	
Impact Protection	IK09	

Order Reference

Model	Example :
SL 423	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">SL 423</div> <div style="margin: 0 5px;">-</div> <div style="border: 1px solid black; padding: 2px;">SL 423</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="text-align: center;"> _____ Model No. </div> <div style="text-align: center;"> _____ Model </div> </div>

Order Information

Model No.	Ø (mm)	H(mm)	H1(mm)
SL 423	300	110	154

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

