

# URANUS LED

## SLT Linear Highbay Series

### Features

LED lamps control configuration of 2 row & 3 row to match conventional type metal halide halide fixtures. Easy mounting options from direct ceiling, rigid suspension rod or flexible chain mounting. Precise control of light distribution at high mounting height with large coverage area and every light distribution.



### Applications

Ideal for manufacturing plants, sports halls, industrial areas, warehouses and etc.


### Optics

Reflector Material	White Paint Anodised Aluminium
Beam Angle	120°


### Optional Features / Accessories

Fixed Output/Dali/1-10V
-------------------------

### Mounting

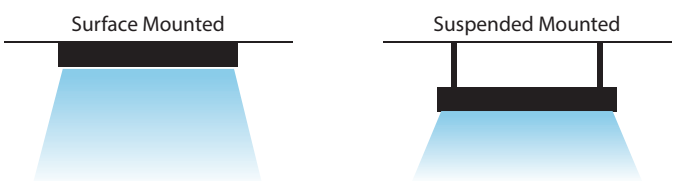

### Lighting Data

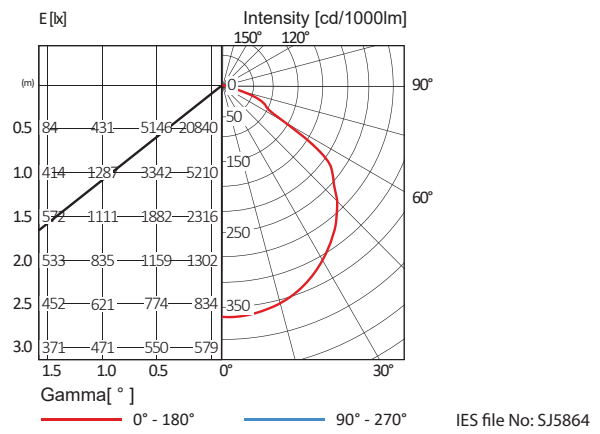




## Specifications

Model	SLT B3 (1x2)	SLT D3 (1x4)	SLT F3 (1x4)	SLT D5 (1x4)
Nominal Power	49W	97W	149W	99W
Nominal System Lumen Output	7100 lm	14150 lm	21750 lm	15670 lm
Nominal System Efficacy	145 lm/W	146 lm/W	146 lm/W	158 lm/W
LED Driver	Xitanium/Philips			Tridonic
Light Source	Fortimo			Tridonic
Colour Temperature (CCT)	4000K/6500K			
Input Voltage	220V~50Hz			
Colour Rendering Index (CRI)	80			
Luminaire Rated Life	50,000hrs (L70B50)			
Operating Temperature	-20°C ~ +45°C			
Power Factor	0.95PF			
Total Harmonic Distortion	≤20%			
Insulation Class	Class I			
Housing Material	Cold Roll Steel			
Ingress Protection	IP20			

## Order Reference

Model	Number Of Module	Brand Of Component
SLT	A ( 1 module )	3 - Xitanium
	B ( 2 modules )	4 - Philips
	C ( 3 modules )	5 - Tridonic
	D ( 4 modules )	7 - Osram
	E ( 5 modules )	
	F ( 6 modules )	

### Example :

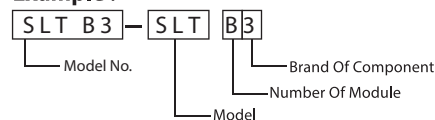

## Order Information

Model No.	L(mm)	W(mm)	H(mm)
SLT B3 (1x2)	595	185	70
SLT D3 (1x4)	1175	185	70
SLT F3 (1x4)	1175	250	70
SLT D5 (1x4)	1180	185	70

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.

## Dimensions

