

# ECLIPSE LED

## SEU Surface/Suspended Mounted LED Linear Diffused Series

### Features

Aesthetically designed LED Linear Trunking series suitable for suspended downward type with housing made from high-quality extruded aluminium. It provides low-glare illumination and can be installed as a standalone unit or as a continuous modular units.

### Applications

Ideal for offices, schools, commercial, hospital, department stores and hypermarkets.

### Optics

Diffuser Material	PMMA
Diffuser Pattern	Frosted



Suspension Kits




Surface Mounting Brackets


### Optional Features / Accessories

Dali/1-10V Dimming Control
Suspension Kits
Surface Mounting Brackets

### Mounting

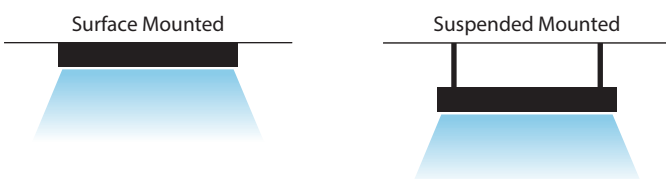

### Lighting Data

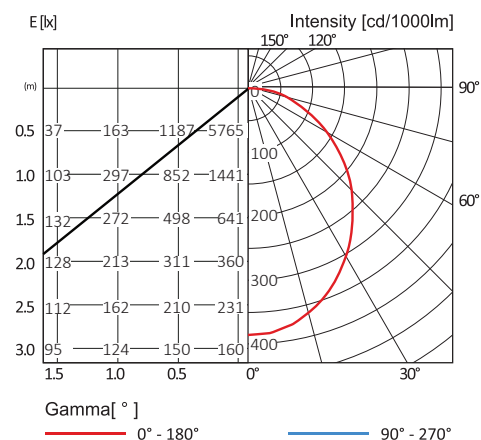

IES file No: SJ11067




## Specifications

Model	SEU A5	SEU B5
Nominal Power	18W	34W
Nominal System Lumen Output	1800 lm	3700 lm
Nominal System Efficacy	100 lm/W	108 lm/W
LED Driver	Tridonic LC	
Light Source	Tridonic LLE	
Colour Temperature (CCT)	3000K/4000K/6500K	
Input Voltage	240V~50Hz	
Colour Rendering Index (CRI)	>80	
Luminaire Rated Life	50,000hrs (L70B50)	
Operating Temperature	-20°C ~ +45°C	
Power Factor	>0.9PF	
Total Harmonic Distortion	≤20%	
Insulation Class	Class I	
Housing Material	Extruded Aluminium	
Ingress Protection	IP20	

## Order Reference

Model	Number Of Module	Brand Of Component
SEU	A ( 1 module ) B ( 2 modules ) C ( 3 modules ) D ( 4 modules )	4 - Philips 5 - Tridonic 7 - Osram

### Example :

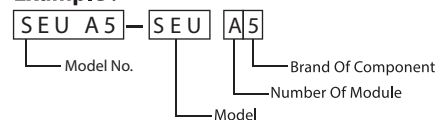

## Order Information

Model No.	L(mm)	W(mm)	H(mm)
SEU A5	568	50	75
SEU B5	1128	50	75

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.

## Dimensions

