


PLUTO LED

SL 126 Spotlight Series (IP65)

Features

Designed for surface mounted with high performance LED light source. Provides optimal light distribution and energy savings.

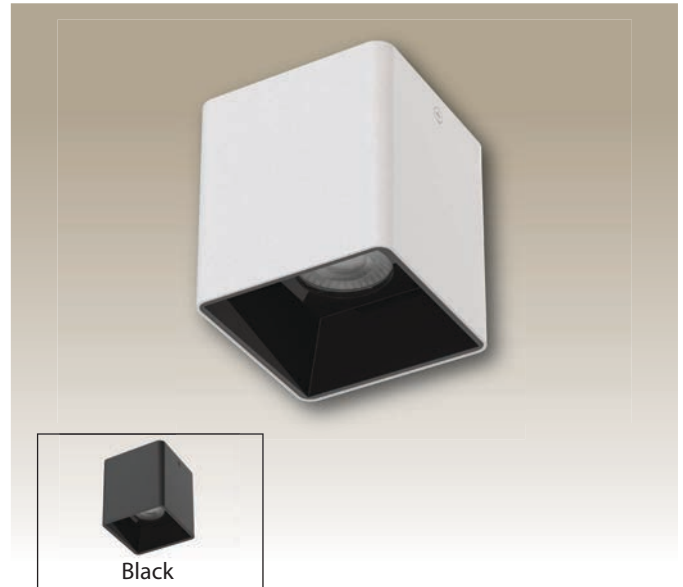

Applications

Ideal for commercial building, lobby, conventional hall, ballroom and concourse.


Optics

Reflector Material	Metallized Silver, White, Black & Gold
Diffuser Material	PMMA Lens
Beam Angle	15° / 24° / 36° / 60°

Optional Features / Accessories

Dali/1-10V Dimming Control

Mounting






Specifications

Model	SL 126.2 (9W)	SL 126.3 (9W)	SL 126.3 (14W)	SL 126.3 (19W)	SL 126.4 (24W)
Nominal Power	9.4W	9.4W	13.5W	18.5W	23W
Nominal System	1360 lm	1360 lm	1810 lm	2380 lm	3185 lm
	1430 lm	1430 lm	1905 lm	2505 lm	3355 lm
	1475 lm	1475 lm	1960 lm	2580 lm	3455 lm
Lumen Output	1490 lm	1490 lm	1980 lm	2605 lm	3485 lm
	159 lm/W	159 lm/W	147 lm/W	131 lm/W	156 lm/W
	167 lm/W	167 lm/W	154 lm/W	137 lm/W	164 lm/W
Efficacy	172 lm/W	172 lm/W	159 lm/W	141 lm/W	169 lm/W
	174 lm/W	174 lm/W	161 lm/W	143 lm/W	170 lm/W
Model	SL 126.4 (27W)	SL 126.4 (32W)	SL 126.4 (34W)	SL 126.5 (34W)	SL 126.5 (41W)
Nominal Power	26.5W	30.7W	34.1W	34.1W	40.2W
Nominal System	3615 lm	4010 lm	4635 lm	4635 lm	5210 lm
	3805 lm	4220 lm	4880 lm	4880 lm	5485 lm
	3915 lm	4345 lm	5025 lm	5025 lm	5645 lm
Lumen Output	3955 lm	4390 lm	5075 lm	5075 lm	5700 lm
	150 lm/W	144 lm/W	150 lm/W	150 lm/W	142 lm/W
	158 lm/W	151 lm/W	158 lm/W	158 lm/W	150 lm/W
Efficacy	162 lm/W	156 lm/W	162 lm/W	162 lm/W	154 lm/W
	164 lm/W	158 lm/W	164 lm/W	164 lm/W	156 lm/W
LED Driver	DONE				
Light Source	Comfort COB				
Colour Temperature (CCT)	2700K/3000K/4000K/5700K				
Input Voltage	220-240V~50/60Hz				
Colour Rendering Index (CRI)	>80				
UGR	>12				
Luminaire Rated Life	50,000hrs (L80/B10)				
Operating Temperature	-20°C ~ +40°C				
Power Factor	0.95PF				
Total Harmonic Distortion	<20%				
Insulation Class	Class I				
Housing Material	Die-cast aluminium				
Ingress Protection	IP65				

Order Reference

Model	Size	Wattage
SL 126	2	9 27
	3	14 32
	4	19 34
	5	24 41

Example :





Order Information

Model No.	W(mm)	L(mm)	H(mm)
SL 126.2 (9W)	74	74	90
SL 126.3 (9W)	92	92	100
SL 126.3 (14W)	92	92	100
SL 126.3 (19W)	92	92	100
SL 126.4 (24W)	113	113	120
SL 126.4 (27W)	113	113	120
SL 126.4 (32W)	113	113	120
SL 126.4 (34W)	113	113	120
SL 126.5 (34W)	130	130	140
SL 126.5 (41W)	130	130	140

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

