



AURORAS LED

SLR Recessed Mounted LED Linear Louvre Series

Features

The LED Panel Light delivers premium LED performance with directional luminance control (360°) glare control. Its is rare that an architecturally inspired range of luminaires for recessed.

Applications

Ideal for hospital, offices, retail stores, supermarkets, schools, hotels, factories, car parks and other indoor application.


Optics

Diffuser Material	PMMA
Diffuser Pattern	LED Opal
Louvre Material	White Paint Anodised Aluminium


Optional Features / Accessories

Dali/1-10V Dimming Control

Mounting



Lighting Data

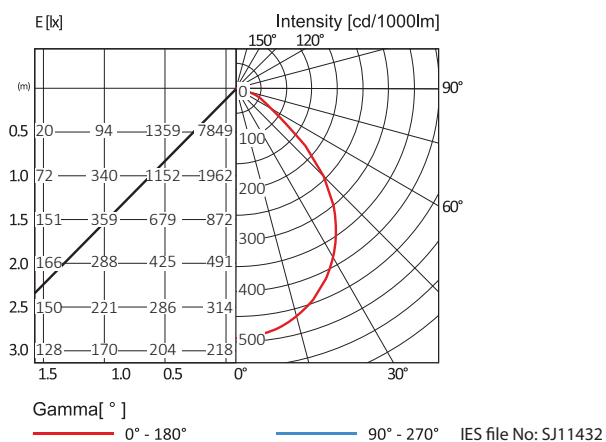




Specifications

Model	SLR D5 MM (1X4)	SLR D5 (2X2)
Nominal Power	24W	31W
Nominal System Lumen Output	3190 lm	3980 lm
Nominal System Efficacy	133 lm/W	128 lm/W
LED Driver	Tridonic LC	
Light Source	Tridonic LLE	
Colour Temperature (CCT)	3000K/4000K/6500K	
Input Voltage	240V~50Hz	
Colour Rendering Index (CRI)	>80	
Luminaire Rated Life	50,000hrs (L70B50)	
Operating Temperature	-20°C ~ +45°C	
Power Factor	>0.9PF	
Total Harmonic Distortion	≤20%	
Insulation Class	Class I	
Housing Material	Cold Roll Steel	
Ingress Protection	IP20	

Order Reference

Model	Number Of Module	Brand Of Component
SLR	A (1 module) B (2 modules) C (3 modules) D (4 modules)	4 - Philips 5 - Tridonic 7 - Osram

Example :

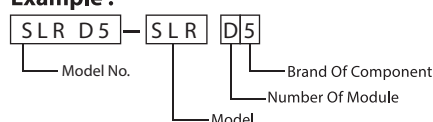

Order Information

Model No.	L(mm)	W(mm)	H(mm)
SLR D5 MM (1x4)	1195	295	105
SLR D5 (2x2)	605	605	105

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

