

METEOR LED

SRU Recessed Mounted LED Linear Louvre Series

Features

Designed for recess mounting ceiling. LED panel light highlighting the use of a new generation of low power and high power LED as light source. Excellent light transmission, which provide an outstanding performance effect for your application. Good control of luminous with design cut off angle of 60°.

Applications

Ideal for offices, retail stores, supermarkets, schools, hotels, factories, car parks and other indoor application.

Optics

Diffuser Material	PMMA
Louvre Material	High Quality Anodised Aluminium
Louvre Type	Specular


Optional Features / Accessories

Dali/1-10V Dimming Control

Mounting



Lighting Data

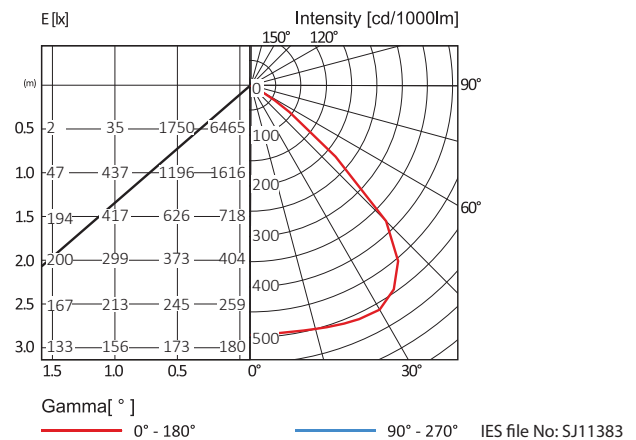




Specifications

Model	SRU A5 1(1X2)	SRU B5 (1X4)
Nominal Power	12W	24W
Nominal System Lumen Output	1550 lm	3280 lm
Nominal System Efficacy	129 lm/W	137 lm/W
LED Driver	Tridonic LC	
Light Source	Tridonic LLE	
Colour Temperature (CCT)	3000K/4000K/6500K	
Input Voltage	240V~50Hz	
Colour Rendering Index (CRI)	>80	
Luminaire Rated Life	50,000hrs (L70B50)	
Operating Temperature	-20°C ~ +45°C	
Power Factor	>0.9PF	
Total Harmonic Distortion	≤20%	
Insulation Class	Class I	
Housing Material	Cold Roll Steel	
Ingress Protection	IP20	

Order Reference

Model	Number Of Module	Brand Of Component
SRU	A (1 module)	4 - Philips
	B (2 modules)	5 - Tridonic
	C (3 modules)	7 - Osram
	D (4 modules)	

Example :

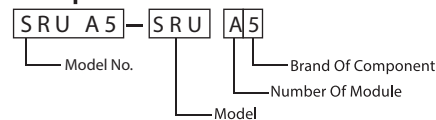

Order Information

Model No.	L(mm)	W(mm)	H(mm)
SRU A5 (1X2)	595	295	70
SRU B5 (1X4)	1195	295	70

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

