SIRIM QAS
CERTIFIED TO
MS IEC 60598-1 & MS IEC 60598-2-1
CERT.NO PS008202





ECO SDM 2C 240 (1x4)

SONIC LED

ECO Surface Mounted Sym Radius Series

Features

Designed for direct surface mounted, single parabolic with mirror optic louvre and christmas cross blades. An attractive appearances is enhanced with its rounded edge body surround.


Application

Ideal for use in modern interiors such as hotels, schools, government building, shopping complexes, offices, hospitals, and etc.

Luminaire Product Description

Mounting	Surface
Housing Material	Cold Rolled Steel
Coating	Epoxy Polyester Powder
Light Source	SJLITE ECO Glass Tube HO
Input Voltage & Frequency	240V~, 50Hz
Operating Temperature	-20°C ~ +45°C
Power Factor	>0.9
Ingress Protection	IP20
Total Harmonic Distortion	≤20%
Insulation Classification	Class I

Wiring Diagram

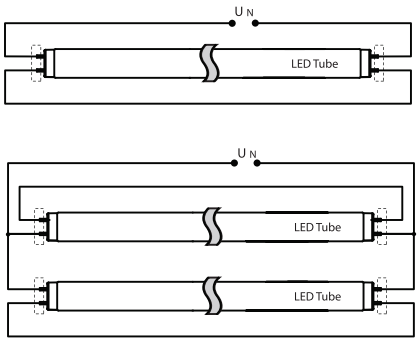


Optics

Louvre Material	High Quality Anodised Aluminium
Louvre Type	Specular

Control

*Dimming Option	Fixed Output


Dimension



Order Reference

Model	Quantity Of Tube	Length Of Tube
ECO SDM	1	A (2ft)
	2	C (4ft)

Example :

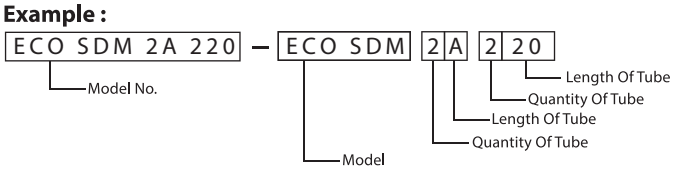

Order Information

Model No.	No. Of Lamp	L(mm)	L1(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
ECO SDM 2A 220 (1x2)	2	683	-	292	-	65	-
ECO SDM 1C 140 (1x4)	1	1293		190			
ECO SDM 2C 240 (1x4)	2			292			

Note : Subject to +/- 1.5mm

*Other various types are available upon request.