

COMET LED

SL 265 LED Tracklight Series

Features

Perfect for highlighting products. Choice of color temperature and beam angles. Available in white and black finishes.

Applications

Ideal for retail shops, showroom, office, restaurants and etc.


Optics

| | |
|--------------------|-----------------------|
| Reflector Material | Aluminium Reflector |
| Reflector Angle | 15° / 30° / 40° / 55° |


Optional Features / Accessories

| | |
|----------------|--------------|
| Dimming Option | Fixed Output |
|----------------|--------------|

Mounting



Lighting Data

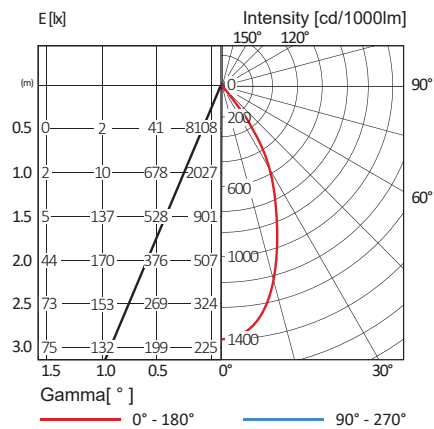

IES file No: SJ5800



Specifications

| Model | SL 265 | | | |
|------------------------------|------------------------------|---------|---------|----------|
| Nominal Power | 8W | 15W | 22W | 30W |
| Nominal System Lumen Output | 650 lm | 1250 lm | 2000 lm | 3000 lm |
| Nominal System Efficacy | 81 lm/W | 83 lm/W | 91 lm/W | 100 lm/W |
| LED Driver | Philips CertaDrive/Xitanium | | | |
| Light Source | Cree CXA | | | |
| Colour Temperature (CCT) | 3000K/3500K/4000K | | | |
| Input Voltage | 220-240V~50/60Hz | | | |
| Colour Rendering Index (CRI) | 80 | | | |
| Luminaire Rated Life | 30,000hrs/50,000hrs (L70B50) | | | |
| Operating Temperature | -20°C ~ +45°CSS | | | |
| Power Factor | 0.9PF | | | |
| Total Harmonic Distortion | ≤20% | | | |
| Insulation Class | Class I | | | |
| Housing Material | Die Cast Aluminium | | | |
| Ingress Protection | IP20 | | | |

Order Reference

| Model No. | Example : |
|-----------|---|
| SL 265 | <div style="display: inline-block; border: 1px solid black; padding: 2px;">SL 265</div> - <div style="display: inline-block; border: 1px solid black; padding: 2px;">SL 265</div> <div style="display: flex; justify-content: space-around; width: 100%; margin-top: 5px;"> └─ Model No. └─ Model </div> |

Order Information

| Model No. | Ø(mm) | H(mm) |
|-----------|-------|-------|
| SL 265 | 95 | 145 |

Note : Subject to +/- 1.5mm

*Other various types are available upon request.

Dimensions

